



J. Steve Rahon
Director
Tariffs & Regulatory Accounts
8330 Century Park Court
San Diego, CA 92123-1548

Tel: 858.654.1773
Fax: 858.654.1788
srahon@semprautilities.com

August 18, 2004

ADVICE LETTER 1616-E
(U 902-E)

PUBLIC UTILITIES COMMISSION OF THE STATE OF CALIFORNIA

SUBJECT: REVISION TO ELECTRIC RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

San Diego Gas & Electric Company (SDG&E) hereby transmits for filing the following revision to its electric tariffs, as shown in the enclosed Attachment.

PURPOSE

The purpose of this Advice Letter is to revise SDG&E's electric Rule 21, Interconnection Standards for Non-Utility Owned Generation, in order to make text and content changes to make it consistent with the requirements of the American National Standards Institute and Institute of Electrical and Electronic Engineers Standard for Interconnecting Distributed Resources with Electric Power Systems (ANSI/IEEE 1547-2003). This filing will also create a uniform Rule 21 for SDG&E, Southern California Edison Company and Pacific Gas and Electric Company (utilities) as agreed to by the Rule 21 working group.

BACKGROUND

On December 21, 2000, the California Public Utilities Commission (Commission) issued Decision (D.) 00-12-037 adopting new electric interconnection standards, an interconnection agreement and application form for distributed generation.

In D.00-12-037 the Commission recognized that "establishment of a post-implementation working group is a prudent and effective way to provide an opportunity for ongoing evaluation of implementation issued under the new rule and potential revisiting of areas of concern." (Conclusion of Law No. 9.) A post-implementation working group led by the California Energy Commission was developed to address the adequacy of Rule 21, and the associated agreement and application form on an ongoing basis. As part of this process, the working group has identified changes to Rule 21 to be in compliance with ANSI/IEEE 1547-2003, and to create a uniform Rule 21 for the utilities. Following is a general overview of the revisions being made by this filing.

Section A - Applicability and Introduction

Clarifies that Rule 21 is consistent with the requirements of ANSI/IEEE 1547-2003.

Section B - General Rules, Rights and Obligations

A small number of word changes were made to create uniformity among the utilities.

Section C - Application and Interconnection Process

This section has been divided into Section C.1, "Application Process" and Section C.2 "Interconnection Process." Section C.1.a. remains the same. Section C.1.b. has some structural changes and the information regarding the Initial Review fee has been removed from a table format and replaced with text for easier readability. Section C.1.c.3. clarifies the process described by adding a reference to the Initial Review and also describes the fee required if a Supplemental Review is required. Section C.1.d. was updated to reflect changes to Public Utilities Codes affecting Net Energy Metering. Additionally, Table C.1 has been added to summarize fees and exemptions. Sections C.1.e through C.1.h. have been moved to a new Section C.2, Interconnection Process, as Sections C.2.a. through C.2.d. Section C.1.i has been deleted. All other changes to Section C were made to clarify or improve the readability of the section.

Section D - Generating Facility Design and Operating Requirements

This section has been revised to be consistent with the requirements of ANSI/IEEE1547-2003 with the exception of IEEE 1547 Clauses 4.1.4.2, 4.1.8.1 and 5.1.3.1 which address protection from electromagnetic interference and is currently being studied for inclusion in a subsequent version of Rule 21. Also, the Generating Facility power limitation of 10 MW in IEEE 1547 is not reflected in Rule 21 at this time.

Subsection c. of Section D.1, General Interconnection and Protection Requirements, has been deleted which causes the rest of the numbering in Section D to change. Section D.1.e., now D.1.d., has been expanded to more clearly define what capabilities the isolating switch or device to isolate the Generating Facility from SDG&E's Distribution System must have. The voltage operating range limits in this section have been changed from 11 kVA or less and greater than 11 kVA to 30 kVA or less and greater than 30 kVA. The Voltage Trip Settings Chart has also been reconfigured with a second chart, Frequency Trip Settings. Two new sections on Paralleling and Integration with SDG&E's Distribution System Grounding have been added.

Section D.2.d., Harmonics, changed to Section D.2.g. and a new "Maximum harmonic current distortion in percent of current" table was added.

Section D.3.a., Technology Specific Requirements, has been changed to D.3. and the subparagraphs renumbered. Section D.3.b., Supplemental Generating Facility Requirements, has been changed to Section D.4.

Section D.4 includes Section D.4.a., Fault Detection, Section D.4.b., Transfer Trip, and D.4.c., Re-close Blocking. Transfer Trip and Re-close Blocking are new sections containing additional information.

Section E - Interconnection Facilities and Distribution System Modifications, Ownership and Financing

The title of this section has been slightly modified. Throughout Section E.3, the word "improvements" was changed to "modifications" in the text as well as the titles. In Section E.3.a., the paragraph has been expanded to include the title and description of the agreement required by the tariff.

Section F – Metering, Monitoring and Telemetry

Clarifying sentences and word changes were added to Sections F.2, F.3 and F.4. The sunset provision date in Section F.6 that requires the utilities to file permanent metering requirements with the Commission has been extended to December 31, 2005.

Section G - Dispute Resolution Process

No changes were made to this section.

Section H - Definitions

New definitions were added for Device, Function, Load Carrying Capability, and Paralleling Device. The definition for Visible Disconnect has been deleted because it is defined in Section D.1.d. Changes were made to other definitions to create uniformity in the tariffs.

Section I - Review Process for Applications to Interconnect Generating Facilities

Several modifications were made to the screens to simplify the review process. The Initial and Supplemental Review Process Flow Chart was also modified.

Section J – Certification and Testing Criteria

Changes were made to this section relative to IEEE 1547-2003 and have resulted in changes in set points, test criteria, test procedures, and other requirements that will impact previously certified or listed equipment as well as equipment currently under evaluation. These changes were made to provide consistency with IEEE 1547-2003. Equipment that is certified or that has been submitted to a Nationally Recognized Testing Laboratory for testing on or before December 31, 2004, and that subsequently meets the previous Rule 21 certification requirements will continue to be accepted as certified equipment through December 31, 2005.

No cost information is required for this Advice Letter.

This filing will not increase any rate or charge, cause withdrawal of service, or conflict with any other schedule or rule.

EFFECTIVE DATE

SDG&E respectfully requests that this filing become effective on September 27, 2004, which is 40 calendar days after the date filed.

PROTEST

Anyone may protest this Advice Letter to the Commission. The protest must state the grounds upon which it is based, including such items as financial and service impact, and should be submitted expeditiously. The protest must be made in writing and must be received within 20 days of the date this Advice Letter was filed with the Commission. There is no restriction on who may file a protest. The address for mailing or delivering a protest to the Commission is:

IMC Branch Chief
Energy Division
California Public Utilities Commission
505 Van Ness Avenue, 4th Floor
San Francisco, CA 94102

Copies of the protest should also be sent via e-mail to the attention of both Jerry Royer (jjr@cpuc.ca.gov) and to Honesto Gatchalian (jnj@cpuc.ca.gov) of the Energy Division. A copy of the protest should also be sent via both e-mail and facsimile to the address shown below on the same date it is mailed or delivered to the Commission.

Attn: Monica Wiggins
Regulatory Tariff Manager
8330 Century Park Court, Room 32C
San Diego, CA 92123-1548
Facsimile No. (858) 654-1788
E-mail: MWiggins@SempraUtilities.com

NOTICE

In accordance with Section III-G of General Order 96-A, a copy of this filing has been served on the utilities and interested parties shown on the attached list by providing them a copy hereof either electronically or via the U.S. mail, properly stamped and addressed.

Address changes should be directed to Christina Sondrini by facsimile at (858) 654-1788 or by e-mail at CSondrini@SempraUtilities.com.

J. STEVE RAHON
Director – Tariffs & Regulatory Accounts

ATTACHMENT
ADVICE LETTER 1616-E

Cal. P.U.C. Sheet No.	Title of Sheet	Canceling Cal. P.U.C. Sheet No.
Revised 17275-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 1	Revised 15511-E
Revised 17276-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 2	Revised 15512-E
Revised 17277-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 3	Revised 15513-E
Revised 17278-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 4	Revised 15514-E
Revised 17279-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 5	Revised 16706-E
Revised 17280-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 6	Revised 15516-E
Revised 17281-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 7	Revised 15517-E
Revised 17282-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 8	Revised 15518-E
Revised 17283-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 9	Revised 15519-E
Revised 17284-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 10	Revised 15520-E
Revised 17285-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 11	Revised 15521-E
Revised 17286-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 12	Revised 15522-E
Revised 17287-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 13	Revised 15523-E
Revised 17288-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 14	Revised 15524-E
Revised 17289-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 15	Revised 15768-E
Revised 17290-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 16	Revised 15526-E
Revised 17291-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 17	Revised 15527-E
Revised 17292-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 18	Revised 15528-E
Revised 17293-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 19	Revised 15529-E
Revised 17294-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 20	Revised 15530-E
Revised 17295-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 21	Revised 15531-E

ATTACHMENT
ADVICE LETTER 1616-E

Cal. P.U.C. Sheet No.	Title of Sheet	Canceling Cal. P.U.C. Sheet No.
Revised 17296-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 22	Revised 15532-E
Revised 17297-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 23	Revised 15533-E
Revised 17298-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 24	Revised 15534-E
Revised 17299-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 25	Revised 15535-E
Revised 17300-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 26	Revised 15536-E
Revised 17301-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 27	Revised 15537-E
Revised 17302-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 28	Revised 15538-E
Revised 17303-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 29	Revised 15539-E
Revised 17304-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 30	Revised 15540-E
Revised 17305-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 31	Revised 15541-E
Revised 17306-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 32	Revised 15542-E
Revised 17307-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 33	Revised 15543-E
Revised 17308-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 34	Revised 15544-E
Revised 17309-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 35	Revised 15545-E
Revised 17310-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 36	Revised 15546-E
Revised 17311-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 37	Revised 15547-E
Revised 17312-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 38	Revised 15548-E
Revised 17313-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 39	Revised 15549-E
Revised 17314-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 40	Revised 15550-E
Revised 17315-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 41	Revised 15551-E
Original 17316-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 42	

ATTACHMENT
ADVICE LETTER 1616-E

Cal. P.U.C. Sheet No.	Title of Sheet	Canceling Cal. P.U.C. Sheet No.
Original 17317-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 43	
Original 17318-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 44	
Original 17319-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 45	
Original 17320-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 46	
Original 17321-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 47	
Original 17322-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 48	
Original 17323-E	RULE 21, INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION, Sheet 49	
Revised 17324-E	TABLE OF CONTENTS, Sheet 1	Revised 17140-E
Revised 17325-E	TABLE OF CONTENTS, Sheet 5	Revised 17083-E



RULE 21

Sheet 1

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

A. APPLICABILITY AND INTRODUCTION

Applicability. This Rule describes the Interconnection, operating and Metering requirements for Generating Facilities to be connected to San Diego Gas & Electric's (SDG&E) Distribution System over which the California Public Utilities Commission (Commission) has jurisdiction. Subject to the requirements of this Rule, SDG&E will allow the Interconnection of Generating Facilities with its Distribution System.

Definitions. Capitalized terms used in this Rule, and not defined in SDG&E's other tariffs, shall have the meaning ascribed to such terms in Section H of this Rule. The definitions set forth in Section H of this Rule shall only apply to this Rule and may not apply to SDG&E's other tariffs.

Consistency with IEEE 1547. This Rule has been revised to be consistent with the requirements of ANSI/IEEE¹ 1547-2003 *Standard for Interconnecting Distributed Resources with Electric Power Systems* (IEEE 1547). In some cases, IEEE 1547 language has been adopted directly, in others, IEEE 1547 requirements were interpreted and this Rule's language was changed to maintain the spirit of both documents.

B. GENERAL RULES, RIGHTS AND OBLIGATIONS

1. **Authorization Required to Operate.** A Producer must comply with this Rule, execute an Interconnection Agreement with SDG&E, and receive SDG&E's express written permission before Parallel Operation of its Generating Facility with SDG&E's Distribution System. SDG&E shall apply this Rule in a non-discriminatory manner and shall not unreasonably withhold its permission for a Parallel Operation of Producer's Generating Facility with SDG&E's Distribution System.
2. **Separate Agreements Required for Other Services.** A Producer requiring other electric services from SDG&E including, but not limited to, Distribution Service provided by SDG&E during periods of curtailment or interruption of the Producer's Generating Facility, must enter into agreements with SDG&E for such services in accordance with SDG&E's Commission-approved tariffs.
3. **Services Not Provided with Interconnection.** Interconnection with SDG&E's Distribution System under this Rule does not provide a Producer any rights to utilize SDG&E's System for the transmission, distribution, or wheeling of electric power, nor does it limit those rights.
4. **Compliance with Laws, Rules, and Tariffs Schedules.** A Producer shall ascertain and comply with applicable Commission-approved tariffs of SDG&E; applicable Federal Energy Regulatory Commission (FERC) approved rules, tariffs, and regulations; and any local, state or federal law, statute or regulation which applies to the design, siting, construction, installation, operation, or any other aspect of the Producer's Generating Facility and Interconnection Facilities.

¹ ANSI – American National Standards Institute; IEEE – Institute of Electrical and Electronic Engineers

(Continued)

T
T

N
|
N

T
T

N



RULE 21

Sheet 2

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

B. GENERAL RULES, RIGHTS AND OBLIGATIONS (Continued)

5. **Design Reviews and Inspections.** SDG&E shall have the right to review the design of a Producer's Generating and Interconnection Facilities and to inspect a Producer's Generating and/or Interconnection Facilities prior to the commencement of Parallel Operation with SDG&E's Distribution System. SDG&E may require a Producer to make modifications as necessary to comply with the requirements of this Rule. SDG&E's review and authorization for Parallel Operation shall not be construed as confirming or endorsing the Producer's design or as warranting the Generating and/or Interconnection Facility's safety, durability or reliability. SDG&E shall not, by reason of such review or lack of review, be responsible for the strength, adequacy, or capacity of such equipment.
6. **Right to Access.** A Producer's Generating Facility and Interconnection Facilities shall be reasonably accessible to SDG&E personnel as necessary for SDG&E to perform its duties and exercise its rights under its tariffs approved by the Commission, and any Interconnection Agreement between SDG&E and the Producer.
7. **Confidentiality of Information.** Any information pertaining to Generating and/or Interconnection Facilities provided to SDG&E by a Producer shall be treated by SDG&E in a confidential manner. SDG&E shall not use information contained in the Application to propose discounted tariffs to the Customer unless authorized to do so by the Customer or the information is provided to SDG&E by the Customer through other means.
8. **Prudent Operation and Maintenance Required.** A Producer shall operate and maintain its Generating Facility and Interconnection Facilities in accordance with Prudent Electrical Practices and shall maintain compliance with this Rule.
9. **Curtailement and Disconnection.** SDG&E may limit the operation or disconnect or require the disconnection of a Producer's Generating Facility from SDG&E's Distribution System at any time, with or without notice, in the event of an Emergency, or to correct Unsafe Operating Conditions. SDG&E may also limit the operation or disconnect or require the disconnection of a Producer's Generating Facility from SDG&E's Distribution System upon the provision of reasonable written notice: 1) to allow for routine maintenance, repairs or modifications to SDG&E's Distribution System; 2) upon SDG&E's determination that a Producer's Generating Facility is not in compliance with this Rule; or 3) upon termination of the Interconnection Agreement. Upon the Producer's written request, SDG&E shall provide a written explanation of the reason for such curtailment or disconnection.

(Continued)

2P24

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 3

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

C. APPLICATION AND INTERCONNECTION PROCESS

1. Application Process

- a. **Applicant Initiates Contact with SDG&E.** Upon request, SDG&E will provide information and documents (such as sample agreements, Application, technical information, listing of Certified Equipment, Initial and Supplemental Review fee information, applicable tariff schedules and Metering requirements) to a potential Applicant. Unless otherwise agreed upon, all such information shall normally be sent to the Applicant within three (3) business days following the initial request from the Applicant. SDG&E will establish an individual representative as the single point of contact for the Applicant, but may allocate responsibilities among its staff to best coordinate the Interconnection of an Applicant's Generating Facility.
- b. **Applicant Completes an Application.** All Applicants shall complete and file an Application and supply any relevant additional information requested by SDG&E. When applicable per Table C.1, an \$800 Initial Review Fee shall be included with the Application.
 - (1) Normally, within 10 business days of receiving the Application, SDG&E shall acknowledge its receipt and state whether the Application has been completed adequately. If defects are noted, SDG&E and Applicant shall cooperate in a timely manner to establish a satisfactory Application.
 - (2) The Initial Review fee shall be waived for Applications requesting Interconnection pursuant to Sections 2827, 2827.8, 2827.9, or 2827.10 of the Public Utilities Code, and for Solar powered Generating Facilities that do not sell power to the grid per Commission Decision D.01-07-027.
 - (3) Fifty percent of the fees associated with the Initial Review will be returned to the Applicant if the Application is rejected by SDG&E or the Applicant retracts the Application.
 - (4) Applications that are over one year old (from the date of SDG&E's acknowledgement) without a signed Interconnection Agreement, or a Generating Facility that has not been approved for parallel operation within one year of completion of all applicable review and/or studies are subject to cancellation by SDG&E; however, SDG&E may not cancel an Application if the Producer provides reasonable evidence that the project is still active.
 - (5) The applicant may propose, and SDG&E may agree to reduced costs for reviewing atypical Applications, such as Applications submitted for multiple Generators, multiple sites, or otherwise as conditions warrant.

(Continued)



RULE 21

Sheet 4

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

C. APPLICATION AND INTERCONNECTION PROCESS (Continued)

1. Application Process (Continued)

c. **SDG&E Performs an Initial and Supplemental Review and Develops Preliminary Cost Estimates and Interconnection Requirements.**

- (1) Upon receipt of a satisfactorily completed Application and any additional information necessary to evaluate the Interconnection of a Generating Facility, SDG&E shall perform an Initial Review using the process defined in Section I. The Initial Review determines if: (a) the Generating Facility qualifies for Simplified Interconnection; or (b) the Generating Facility requires a Supplemental Review.
- (2) SDG&E shall complete its Initial Review, absent any extraordinary circumstances, within 10 business days after its determination that the Application is complete. If the Initial Review determines the proposed Generating Facility can be Interconnected by means of a Simplified Interconnection, SDG&E will provide the Applicant with an Interconnection Agreement for Applicant's signature.
- (3) If the Generating Facility does not pass the Initial Review for Simplified Interconnection as proposed, SDG&E will notify the Applicant and perform a Supplemental Review as described in Section I. Applicant shall pay an additional \$600 for the Supplemental Review, unless the Application is withdrawn. The Supplemental Review will result in SDG&E providing either: (a) Interconnection requirements beyond those for a Simplified Interconnection, and an Interconnection Agreement for Applicant's signature; or (b) a cost estimate and schedule for an Interconnection Study. The Supplemental Review shall be completed, absent any extraordinary circumstances, within 20 business days of receipt of a completed Application and fees.

The Supplemental Review fee shall be waived for Applications requesting Interconnection pursuant to Sections 2827, 2827.8, 2827.9, or 2827.10 of the Public Utilities Code, and for Solar powered Generating Facilities that do not sell power to the grid, per Commission Decision D.01-07-027.

(Continued)

4P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T
T
T
T
N
T
T
T
N
|
N



RULE 21

Sheet 5

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

C. APPLICATION AND INTERCONNECTION PROCESS (Continued)

1. Application Process (Continued)

- d. **When Required, Applicant and SDG&E Commit to Additional Interconnection Study Steps.** When a Supplemental Review reveals that the proposed Generating Facility cannot be Interconnected to SDG&E's Distribution System by means of a Simplified Interconnection, or that significant Interconnection Facilities installed on SDG&E's system or Distribution System modifications will be needed to accommodate an Applicant's Generating Facility, SDG&E and Applicant shall enter into an agreement that provides for SDG&E to perform additional studies, facility design and engineering, and to provide cost estimates for fixed price or actual cost billing to the Applicant, at the Applicant's expense. The Interconnection Study agreement shall set forth SDG&E's estimated schedule and charges for completing such work. Interconnection Study fees for solar Generating Facilities up to 1 megawatt (MW) that do not sell power to the grid will be waived up to the amount of \$5,000. Generating Facilities eligible for Net Energy Metering under Public Utilities Code Section 2827, 2827.8, 2827.9, or 2827.10 are exempt from any costs associated with Interconnection Studies.

Table C.1 Summary of Fees and Exemptions

Generating Facility Type	Initial Review Fee	Supplemental Review Fee	Interconnection Study Fees
Non-Net Energy Meeting	\$800*	\$600	As Specified by SDG&E
Net Energy Metering (per Public Utilities Code Sections 2827, 2827.8, 2827.9, or 2827.10)	\$0	\$0	\$0
Solar 1MW or less that does not sell power to the grid (per D.01-07-027)	First \$5,000 of study fees waived		

*Subject to 50% refund pursuant to Section C.1.b.3

2. Interconnection Process

- a. **Applicant and SDG&E Enter Into an Interconnection Agreement and, Where Required, a Financing and Ownership Agreement for Interconnection Facilities or Distribution System Modifications.** SDG&E shall provide the Applicant with an executable version of the Interconnection Agreement or Net Energy Metering Agreement appropriate for the Applicant's Generating Facility and desired mode of operation. Where the Supplemental Review or Interconnection Study performed by SDG&E has determined that modifications or additions to its Distribution System are required, or that additional Interconnection Facilities will be necessary to accommodate and Applicant's Generating Facility, SDG&E may also provide the Applicant with other Interconnection Facilities financing and ownership agreements. These agreements shall set forth SDG&E and the Applicant's responsibilities, completion schedules, and fixed price or estimated costs for the required work.

(Continued)

5P40

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 6

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

C. APPLICATION AND INTERCONNECTION PROCESS (Continued)

2. Interconnection Process (Continued)

- b. **Where Applicable, SDG&E or Producer Installs Required Interconnection Facilities or Modifies SDG&E's Distribution System.** After executing the applicable agreements, SDG&E or Producer will commence construction/installation of SDG&E's Distribution System modifications or Interconnection Facilities which have been identified in the agreements. The parties will use good faith efforts to meet schedules and estimated costs as appropriate.
- c. **Producer Arranges for and Completes Commissioning Testing of Generating Facility and Producer's Interconnection Facilities.** The Producer is responsible for testing new Generating Facilities and associated Interconnection Facilities, according to Section J.5 to ensure compliance with the safety and reliability provisions of this Rule prior to being operated in parallel with SDG&E's Distribution System. For non-Certified Equipment, the Producer shall develop a written testing plan to be submitted to SDG&E for its review and acceptance. Alternatively, the Producer and SDG&E may agree to have SDG&E conduct the required testing at the Producer's expense. Where applicable, the test plan shall include the installation test procedures published by the manufacturer of the generation or interconnection equipment. Facility testing shall be conducted at a mutually agreeable time, and depending on who conducts the test, SDG&E or Producer shall be given the opportunity to witness the tests.
- d. **SDG&E Authorizes Parallel Operation or Momentary Parallel Operation.** SDG&E shall authorize the Producer's Generating Facility for Parallel Operation or Momentary Parallel Operation with SDG&E's Distribution System, in writing, within 5 calendar days of satisfactory compliance with the terms of all applicable agreements. Compliance may include, but not be limited to, provision of any required documentation and satisfactorily completing any required inspections or tests as described herein or in the agreements formed between the Producer and SDG&E. A Producer shall not commence Parallel Operation of its Generating Facility with SDG&E's system unless it has received SDG&E's express written permission to do so.

For Generating Facilities qualifying for service under Public Utilities Code Sections 2827 and 2827.8, SDG&E authorization for Parallel Operation shall normally be provided no later than 30 business days following SDG&E's receipt of 1) a completed Net Energy Metering Application including all supporting documents and required payments; 2) a completed signed Net Energy Metering Interconnection Agreement; and 3) evidence of the Producer's final inspection clearance from the governmental authority having jurisdiction over the Generating Facility. If the 30-day period cannot be met, SDG&E shall notify the Applicant and the Commission.

(Continued)

T L
T
T T T
L
D N
N



RULE 21

Sheet 7

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS

This section has been revised to be consistent with the requirements of ANSI/IEEE 1547-2003 *Standard for Interconnecting Distributed Resources with Electric Power Systems* (IEEE 1547). Exceptions are taken to IEEE 1547 Clauses 4.1.4.2 Distribution Secondary Spot Networks and Clauses 4.1.8.1 or 5.1.3.1, which address Protection from Electromagnetic Interference. These are being studied for inclusion in a subsequent version of this Rule. Also, Rule 21 does not adopt the Generating Facility power limitation of 10 MW incorporated in IEEE 1547.

1. General Interconnection and Protective Function Requirements

The Protective Functions and requirements of this Rule are designed to protect SDG&E's Distribution System and not the Generating Facility. A Producer shall be solely responsible for providing adequate protection for its Generating Facility and Interconnection Facilities. The Producer's Protective Functions shall not impact the operation of other Protective Functions utilized on SDG&E's Distribution System in a manner that would affect SDG&E's capability of providing reliable service to its Customers.

a. **Protective Functions Required.** Generating Facilities operating in parallel with SDG&E's Distribution System shall be equipped with the following Protective Functions to sense abnormal conditions on SDG&E's Distribution System and cause the Generating Facility to be automatically disconnected from SDG&E's Distribution System or to prevent the Generating Facility from being connected to SDG&E's Distribution System inappropriately:

- (1) Over and under voltage trip functions and over and under frequency trip functions;
- (2) A voltage and frequency sensing and time-delay function to prevent the Generating Facility from energizing a de-energized Distribution System circuit and to prevent the Generating Facility from reconnecting with SDG&E's Distribution System unless SDG&E's Distribution System service voltage and frequency is within the ANSI C84.1-1995 Table 1 Range B Voltage Range of 106V to 127V (on a 120V basis), inclusive, and a frequency range of 59.7 Hz to 60.5 Hz, inclusive, and are stable for at least 60 seconds; and
- (3) A function to prevent the Generating Facility from contributing to the formation of an Unintended Island, and cease to energize SDG&E's Distribution System within two seconds of the formation of an Unintended island.

(Continued)



RULE 21

Sheet 8

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

1. General Interconnection and Protective Function Requirements (Continued)

a. **Protective Functions Required** (Continued)

The Generating Facility shall cease to energize SDG&E's Distribution System for faults on SDG&E's Distribution System circuit to which it is connected (IEEE 1547-4.2.1). The Generating Facility shall cease to energize SDG&E's Distribution circuit prior to reclosure by SDG&E's Distribution System equipment (IEEE 1547-4.2.2).

b. **Momentary Paralleling Generating Facilities.** With SDG&E's approval, the transfer switch or scheme used to transfer the Producer's loads from SDG&E's Distribution System to Producer's Generating Facility may be used in lieu of the Protective Functions required for Parallel Operation.

c. **Suitable Equipment Required.** Circuit breakers or other interrupting devices located at the Point of Common Coupling (PCC) must be Certified or "Listed" (as defined in Article 100, the Definitions Section of the National Electrical Code) as suitable for their intended application. This includes being capable of interrupting the maximum available fault current expected at their location. Producer's Generating Facility and Interconnection Facilities shall be designed so that the failure of any single device or component shall not potentially compromise the safety and reliability of SDG&E's Distribution System. The Generating Facility paralleling-device shall be capable of withstanding 220% of the Interconnection Facility rated voltage (IEEE 1547-4.1.8.3). The Interconnection Facility shall have the capability to withstand voltage and current surges in accordance with the environments defined in IEEE STD C62.41.2-2002 or IEEE STD C37.90.1-2002 as applicable and as described in Section J.3.e (IEEE 1547-4.1.8.2).

d. **Visible Disconnect Required.** When required by SDG&E's operating practices, the Producer shall furnish and install a ganged, manually-operated isolating switch (or a comparable device mutually agreed upon by SDG&E and the Producer) near the Point of Interconnection to isolate the Generating Facility from SDG&E's Distribution System. The device does not have to be rated for load break nor provide over-current protection.

The device must:

- (1) allow visible verification that separation has been accomplished. (This requirement may be met by opening the enclosure to observe contact separation.)
- (2) include markings or signage that clearly indicate open and closed positions.
- (3) be capable of being reached quickly and conveniently 24 hours a day by SDG&E personnel for construction, maintenance, inspection, testing or reading, without obstacles or requiring those seeking access to obtain keys, special permission, or security clearances.

(Continued)

8P37

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

N
N
D
L
T
T
T
N
N
T
L
N
N



RULE 21

Sheet 9

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

1. General Interconnection and Protective Function Requirements (Continued)

d. Visible Disconnect Required (Continued)

- (4) be capable of being locked in the open position.
- (5) be clearly marked on the submitted single line diagram and its type and location approved by SDG&E prior to installation. If the device is not adjacent to the PCC, permanent signage must be installed at an SDG&E-approved location providing a clear description of the location of the device.

Generating Facilities with Non-Islanding inverters totaling one (1) kilovolt-ampere (kVA) or less are exempt from this requirement.

- e. **Drawings Required.** Prior to Parallel Operation or Momentary Parallel Operation of the Generating Facility, SDG&E shall approve the Producer's Protective Function and control diagrams. Generating Facilities equipped with Protective Functions and a control scheme previously approved by SDG&E for system-wide application or only Certified Equipment may satisfy this requirement by reference to previously approved drawings and diagrams.

- f. **Generating Facility Conditions Not Identified.** In the event this Rule does not address the interconnection conditions for a particular Generating Facility, SDG&E and Producer may agree upon other arrangements.

2. Prevention of Interference

The Producer shall not operate Generating or Interconnection Facilities that superimpose a voltage or current upon SDG&E's Distribution System that interferes with SDG&E operations, service to SDG&E Customers, or communication facilities. If such interference occurs, the Producer must diligently pursue and take corrective action at its own expense after being given notice and reasonable time to do so by SDG&E. If the Producer does not take corrective action in a timely manner, or continues to operate the facilities causing interference without restriction or limit, SDG&E may, without liability, disconnect the Producer's facilities from SDG&E's Distribution System, in accordance with Section B.9 of this Rule. To eliminate undesirable interference caused by operation, each Generating Facility shall meet the following criteria:

(Continued)

N
D
T
L
T
T
L



RULE 21

Sheet 10

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

2. Prevention of Interference (Continued)

- a. **Voltage Regulation.** The Generating Facility shall not actively regulate the voltage at the PCC while in parallel with SDG&E's Distribution System. The Generating Facility shall not cause the service voltage at other Customers to go outside the requirements of ANSI C84.1-1995, Range A (IEEE 1547-4.1.1).
- b. **Operating Voltage Range.** The voltage ranges in Table D.1 define protective trip limits for the Protective Function and are not intended to define or imply a voltage regulation Function. Generating Facilities shall cease to energize SDG&E's Distribution System within the prescribed trip time whenever the voltage at the PCC deviates from the allowable voltage operating range. The Protective Function shall detect and respond to voltage on all phases to which the Generating Facility is connected.
 - (1) **Generating Facilities (30 kVA or Less).** Generating Facilities with a Gross Nameplate Rating of 30 kVA or less shall be capable of operating within the voltage range normally experienced on SDG&E's Distribution System. The operating range shall be selected in a manner that minimizes nuisance tripping between 106 volts and 132 volts on a 120-volt base (88%-110% of nominal voltage). Voltage shall be detected at either the PCC or the Point of Interconnection.
 - (2) **Generating Facilities (Greater than 30 kVA).** SDG&E may have specific operating voltage ranges for Generating Facilities with Gross Nameplate Ratings greater than 30 kVA and may require adjustable operating voltage settings. In the absence of such requirements, the Generating Facility shall operate at a range between 88% and 110% of the applicable interconnection voltage. Voltage shall be detected at either the PCC or the Point of Interconnection, with settings compensated to account for the voltage at the PCC. Generating Facilities that are Certified Non-Islanding or that meet one of the options of the Export Screen (Section I.3.b) may detect voltage at the Point of Interconnection without compensation.

N
|
N

T L
|
|

T N
|
N L

(Continued)



RULE 21

Sheet 11

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

2. Prevention of Interference (Continued)

b. Operating Voltage Range (Continued)

- (3) **Voltage Disturbances.** Whenever SDG&E's Distribution System voltage at the PCC varies from and remains outside normal (nominally 120 volts) for the predetermined parameters as set forth in Table D-1, the Generating Facility's Protective Functions shall cause the Generator(s) to become isolated from SDG&E's Distribution System:

Table D-1: Voltage Trip Settings

Voltage at Point of Common Coupling		Maximum Trip Time [1]	
Assuming 120 V Base	% of Nominal Voltage	# of Cycles (Assuming 60 Hz Nominal)	Seconds
Less than 60 Volts	Less than 50%	10 Cycles	0.16 Seconds
Greater than or equal to 60 Volts but less than 106 Volts	Greater than or equal to 50% but less than 88%	120 Cycles	2 Seconds
Greater than or equal to 106 Volts but less than or equal to 132 Volts	Greater than or equal to 88% but less than or equal to 110%	Normal Operation	
Greater than 132 Volts but less than or equal to 144 Volts	Greater than 110% but less than or equal to 120%	60 Cycles	1 Second
Greater than 144 Volts	Greater than 120%	10 Cycles	0.16 Seconds

[1] "Maximum Trip Time" refers to the time between the onset of the abnormal condition and the Generating Facility ceasing to energize SDG&E's Distribution System. Protective Function sensing equipment and circuits may remain connected to SDG&E's Distribution System to allow sensing of electrical conditions for use by the "reconnect" feature. The purpose of the allowed time delay is to allow a Generating Facility to "ride through" short-term disturbances to avoid nuisance tripping. Set points shall not be user adjustable (though they may be field adjustable by qualified personnel). For Generating Facilities with a Gross Nameplate Rating greater than of 30 kVA, set points shall be field adjustable and different voltage set points and trip times from those in Table D.1 may be negotiated with SDG&E.

- c. **Paralleling.** The Generating Facility shall parallel with SDG&E's Distribution System without causing a voltage fluctuation at the PCC greater than $\pm 5\%$ of the prevailing voltage level of SDG&E's Distribution System at the PCC, and meet the flicker requirements of Section D.2.d. Section J provides technology-specific tests for evaluating the paralleling function. (IEEE 1547-4.13)

(Continued)

11P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 12

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

2. Prevention of Interference (Continued)

- d. **Flicker.** The Generating Facility shall not create objectionable flicker for other Customers on SDG&E's Distribution System. To minimize the adverse voltage effects experienced by other Customers (IEEE 1547-4.3.2), flicker at the PCC caused by the Generating Facility should not exceed the limits defined by the "Maximum Borderline of Irritation Curve" identified in IEEE 519-1992 (IEEE Recommended Practices and Requirements for Harmonic Control in Electric Power Systems). This requirement is necessary to minimize the adverse voltage effects experienced by other Customers on SDG&E's Distribution System. Generators may be connected and brought up to synchronous speed (as an induction motor) provided these flicker limits are not exceeded.
- e. **Integration with SDG&E's Distribution System Grounding.** The grounding scheme of the Generating Facility interconnection shall not cause overvoltages that exceed the rating of the equipment connected to SDG&E's Distribution System and shall not disrupt the coordination of the ground fault protection on SDG&E's Distribution System (IEEE 1547-4.1.2) (See Section I.3.h).
- f. **Frequency.** SDG&E controls system frequency, and the Generating Facility shall operate in synchronism with SDG&E's Distribution System. Whenever SDG&E's Distribution System frequency at the PCC varies from and remains outside the normal (nominally 60 Hz) by the predetermined amounts set forth in Table D.2, the Generating Facility's Protective Functions shall cease to energize SDG&E's Distribution System within the stated maximum trip time.

Table D.2: Frequency Trip Settings

Generating Facility Rating	Frequency Range (Assuming 60Hz Nominal)	Maximum Trip Time [1] (Assuming 60 Cycles per Second)
Less or equal to 30kW	Less than 59.3 Hz	10 Cycles
	Greater than 60.5 Hz	10 Cycles
Greater than 30kW	Less than 57 Hz	10 Cycles
	Less than an adjustable value between 59.8 Hz and 57 Hz but greater than 57 Hz [2]	Adjustable between 10 and 18,000 Cycles. [2, 3]
	Greater than 60.5 Hz	10 Cycles

[1] – "Maximum Trip Time" refers to the time between the onset of the abnormal condition and the Generating Facility ceasing to energize SDG&E's Distribution System. Protective Function sensing equipment and circuits may remain connected to SDG&E's Distribution System to allow sensing of electrical conditions for use by the "reconnect" feature. The purpose of the allowed time delay is to allow a Generating Facility to "ride through" short-term disturbances to avoid nuisance tripping. Set points shall not be user adjustable (though they may be field adjustable by qualified personnel). For Generating Facilities with a Gross Nameplate Rating greater than 30 kVA, set points shall be field adjustable and different voltage set points and trip times from those in Table D.2 may be negotiated with SDG&E.

[2] – Unless otherwise required by SDG&E, a trip frequency of 59.3 Hz and a maximum trip time of 10 cycles shall be used.

[3] – When a 10 cycle Maximum trip time is used, a second under frequency trip setting is not required.

(Continued)

12P26

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 13

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

2. Prevention of Interference (Continued)

- g. **Harmonics.** When the Generating Facility is serving balanced linear loads, harmonic current injection into SDG&E's Distribution System at the PCC shall not exceed the limits stated below in Table D.3. The harmonic current injections shall be exclusive of any harmonic currents due to harmonic voltage distortion present in SDG&E's Distribution System without the Generating Facility connected (IEEE 1547-4.3.3). The harmonic distortion of a Generating Facility located at a Customer's site shall be evaluated using the same criteria as for the Host Loads.

Table D.3: Maximum harmonic current distortion in percent of current (I) [1,2]

Individual Harmonic order, h (odd harmonics) [3]	$h < 11$	$11 \leq h < 17$	$17 \leq h < 23$	$23 \leq h < 25$	$35 \leq h$	Total demand distortion (TDD)
Max Distortion (%)	4.0	2.0	1.5	0.6	0.3	5.0

[1] – IEEE 1547-4.3.3

[2] – I = the greater of the maximum Host Load current average demand over (15 or 30 minutes) without the Generating Facility, or the Generating Facility rated current capacity (transformed to the PCC when a transformer exists between the Generating Facility and the PCC).

[3] – Even harmonics are limited to 25% of the odd harmonic limits above.

- h. **Direct Current Injection.** Generating Facilities should not inject direct current greater than 0.5% of rated output current into SDG&E's Distribution System.
- i. **Power Factor.** Each Generator in a Generating Facility shall be capable of operating at some point within a power factor range of 0.9 leading to 0.9 lagging. Operation outside this range is acceptable provided the reactive power of the Generating Facility is used to meet the reactive power needs of the Host Loads or that reactive power is otherwise provided under tariff by SDG&E. The Producer shall notify SDG&E if it is using the Generating Facility for power factor correction. Unless otherwise agreed upon by the Producer and SDG&E, Generating Facilities shall automatically regulate power factor, not voltage, while operating in parallel with SDG&E's Distribution System.

(Continued)

13P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 14

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

3. Technology Specific Requirements

- a. **Three-Phase Synchronous Generators.** For three-phase Generators, the Generating Facility circuit breakers shall be three-phase devices with electronic or electromechanical control. The Producer shall be responsible for properly synchronizing its Generating Facility with SDG&E's Distribution System by means of either a manual or automatic synchronizing equipment. Automatic synchronizing is required for all synchronous Generators that have a Short Circuit Contribution Ratio (SCCR) exceeding 0.05. Loss of synchronism is not required except as may be necessary to meet Section D.2.d (Flicker) (IEEE 1547-4.2.5). Unless otherwise agreed upon by the Producer and SDG&E, synchronous Generators shall automatically regulate power factor, not voltage, while operating in parallel with SDG&E's Distribution System. A power system stabilization Function is specifically not required for Generating Facilities under 10 MW Net Nameplate Rating.
- b. **Induction Generators.** Induction Generators (except self-excited Induction Generators) do not require a synchronizing Function. Starting or rapid load fluctuations on induction generators can adversely impact SDG&E's Distribution System's voltage. Corrective step-switched capacitors or other techniques may be necessary and may cause undesirable ferro-resonance. When these counter measures (e.g. additional capacitors) are installed on the Producer's side of the PCC, SDG&E must review these measures. Additional equipment may be required as determined in a Supplemental Review or an Interconnection Study.
- c. **Inverters.** Utility-interactive inverters do not require separate synchronizing equipment. Non-utility-interactive or "stand-alone" inverters shall not be used for Parallel Operation with SDG&E's Distribution System.
- d. **Single-Phase Generators.** For single-phase Generators connected to a shared single-phase secondary system, the maximum Net Nameplate Rating of the Generating Facilities shall be 20 kVA. Generators connected to a center-tapped neutral 240-volt service must be installed such that no more than 6 kVA of imbalanced power is applied to the two "legs" of the 240-volt service. For Dedicated Distribution Transformer services, the maximum Net Nameplate Rating of a single-phase Generating Facility shall be the transformer nameplate rating.

4. Supplemental Generating Facility Requirements

- a. **Fault Detection.** A Generating Facility with an SCCR exceeding .1 or one that does not cease to energize SDG&E's Distribution System within two seconds of the formation of an Unintended Island shall be equipped with Protective Functions designed to detect Distribution System faults, both line-to-line and line-to-ground, and shall cease to energize SDG&E Distribution System within two seconds of the initiation of a fault.

(Continued)

14P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T	L
T	L
N	
N	
D	
T	L
T	L



RULE 21

Sheet 15

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

D. GENERATING FACILITY DESIGN AND OPERATING REQUIREMENTS (Continued)

4. Supplemental Generating Facility Requirements (Continued)

- b. **Transfer Trip.** For a Generating Facility that cannot detect Distribution System faults (both line-to-line and line-to-ground) or the formation of an Unintended Island, and cease to energize SDG&E Distribution System within two seconds, SDG&E may require a Transfer Trip system or an equivalent Protective Function.
- c. **Reclose Blocking.** Where the aggregate Generating Facility capacity exceeds 15% of the peak load on any automatic reclosing device, SDG&E may require additional Protective Functions, including, but not limited to reclose blocking on some of the automatic reclosing devices.

E. INTERCONNECTION FACILITIES AND DISTRIBUTION SYSTEM MODIFICATIONS OWNERSHIP AND FINANCING

1. Scope and Ownership of Interconnection Facilities and Distribution System Modifications

- a. **Scope.** Parallel Operation of Generating Facilities may require Interconnection Facilities or modifications to SDG&E's Distribution System ("Distribution System modifications"). The type, extent and costs of Interconnection Facilities and Distribution System modifications shall be consistent with this Rule and determined through the Supplemental Review and/or Interconnection Studies described in Section C.
- b. **Ownership.** Interconnection Facilities installed on Producer's side of the Point of Common Coupling may be owned, operated, and maintained by the Producer or SDG&E. Interconnection Facilities installed on SDG&E's side of the PCC and Distribution System modifications shall be owned, operated, and maintained only by SDG&E.

2. Responsibility for Costs of Interconnecting a Generating Facility

- a. **Study and Review Costs.** A Producer shall be responsible for the reasonably incurred costs of the reviews and studies conducted pursuant to Section C.1. of this Rule.
- b. **Facility Costs.** A Producer shall be responsible for all costs associated with Interconnection Facilities owned by the Producer. The Producer shall also be responsible for any costs reasonably incurred by SDG&E in providing, operating, or maintaining the Interconnection Facilities and Distribution System modifications required solely for the Interconnection of the Producer's Generating Facility with SDG&E's Distribution System. Generating Facilities eligible for Net Energy Metering under California Public Utilities Code Sections 2827, 2827.8, 2827.9, or 2827.10 are exempt from any costs associated with Distribution System modifications.

(Continued)

15P28

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T
N
N
T L
T
T
T
T
T L



RULE 21

Sheet 16

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

E. INTERCONNECTION FACILITIES AND DISTRIBUTION SYSTEM MODIFICATIONS OWNERSHIP AND FINANCING (Continued)

2. Responsibility for Costs of Interconnecting a Generating Facility (Continued)

- c. **Separation of Costs.** Should SDG&E combine the installation of Interconnection Facilities or Distribution System modifications required for the Interconnection of a Generating Facility with modifications to SDG&E's Distribution System to serve other Customers or Producers, SDG&E shall not include the costs of such separate or incremental facilities in the amounts billed to the Producer.
- d. **Reconciliation of Costs and Payments.** If the Producer selected a fixed price billing for the Interconnection Facilities or Distribution System modifications, no reconciliation will be necessary. If the Producer selected actual cost billing, a true-up will be required. Within a reasonable time after the interconnection of a Producer's Generating Facility, SDG&E will reconcile its actual costs related to the Generating Facility against any advance payments made by the Producer. The Producer will receive either a bill for any balance due or a reimbursement for overpayment as determined by SDG&E's reconciliation. The Producer shall be entitled to a reasonably detailed and understandable accounting for the payments.

3. Installation and Financing of Interconnection Facilities and Distribution System Modifications

- a. **Agreement Required.** The costs of Interconnection Facilities and Distribution System improvements shall be paid by the Producer pursuant to the provisions contained in the Interconnection Agreement. Where the type and extent of the Interconnection Facilities or Distribution System modifications warrant additional detail, Producer and SDG&E shall execute separate agreement(s) to more fully describe and allocate the parties' responsibilities for installing, owning, operating, and maintaining the Interconnection Facilities and Distribution System modifications. These separate agreements shall be the following: SDG&E's "San Diego Gas & Electric Company Contract For Special Facilities" (SDG&E Form 106-1202 (6/96)), and SDG&E's Applicable Tariff Schedules and Rules for Special Facilities.
- b. **Interconnection Facilities and Distribution System Modifications.** Except as provided for in Sections E.2.b. and E.3.c. of this Rule, Interconnection Facilities connected to SDG&E's side of the PCC and Distribution System modifications shall be provided, installed, owned, and maintained by SDG&E at Producer's expense.

(Continued)

16P33

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 17

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

E. INTERCONNECTION FACILITIES AND DISTRIBUTION SYSTEM MODIFICATIONS OWNERSHIP AND FINANCING (Continued)

3. Installation and Financing of Interconnection Facilities and Distribution System Improvements (Continued)

- c. **Third-Party Installations.** Subject to the approval of SDG&E, a Producer may, at its option, employ a qualified contractor to provide and install Interconnection Facilities or Producer paid Distribution System modifications, to be owned and operated by SDG&E, on SDG&E's side of the PCC. Such Interconnection Facilities and Distribution System modifications shall be installed in accordance with SDG&E's design and specifications. Upon final inspection and acceptance by SDG&E, the Producer shall transfer ownership of such Producer installed Interconnection Facilities or Distribution System modifications to SDG&E and such facilities shall thereafter be owned and maintained by SDG&E at the Producer's expense. The Producer shall pay SDG&E's reasonable cost of design, administration, and monitoring of the installation for such facilities to ensure compliance with SDG&E's requirements. The Producer shall also be responsible for all costs, including any income tax liability, associated with the transfer of Producer installed Interconnection Facilities and Distribution System modifications to SDG&E.
- d. **Reservation of Unused Facilities.** When a Producer wishes to reserve SDG&E-owned Interconnection Facilities or Distribution System improvements installed and operated as Special Facilities for the Producer at the Producer's expense, but idled by a change in the operation of the Producer's Generating Facility or otherwise, Producer may elect to abandon or reserve such facilities consistent with the terms of its agreement with SDG&E. If Producer elects to reserve idle Interconnection Facilities or Distribution System improvements, SDG&E shall be entitled to continue to charge Producer for the costs related to the ongoing operation and maintenance of the Special Facilities.
- e. **Refund of Salvage Value.** When a Producer elects to abandon the Special Facilities for which it has either advanced the installed costs or constructed and transferred to SDG&E, the Producer shall, at a minimum, receive from SDG&E a credit for the net salvage value of the Special Facilities.

F. METERING, MONITORING AND TELEMETERING

- 1. **General Requirements.** All Generating Facilities shall be metered in accordance with this Section F and shall meet all applicable standards of SDG&E contained in SDG&E's applicable tariffs and published SDG&E manuals dealing with Metering specifications.

(Continued)

17P33

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 18

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

F. METERING, MONITORING AND TELEMETERING (Continued)

2. **Metering by Non-SDG&E Parties.** The ownership, installation, operation, reading, and testing of revenue Metering Equipment for Generating Facilities shall be by SDG&E except to the extent that the Commission authorizes any or all of these services performed by others.

3. **Net Generation Metering.** For purposes of monitoring Generating Facility operation to determine standby charges and applicable non-bypassable charges as defined in SDG&E's tariffs, and for Distribution System planning and operations, consistent with Section B.4 of this Rule, SDG&E shall have the right to specify the type, and require the installation of, Net Generation Metering equipment. SDG&E shall only require Net Generation Metering to the extent that less intrusive and/or more cost effective options for providing the necessary Generating Facility output data are not available. In exercising its discretion to require Net Generation Metering, SDG&E shall consider all relevant factors, including but not limited to:

- (a) Data requirements in proportion to need for information;
- (b) Producer's election to install equipment that adequately addresses SDG&E's operational requirements;
- (c) Accuracy and type of required Metering consistent with purposes of collecting data;
- (d) Cost of Metering relative to the need for and accuracy of the data;
- (e) The Generating Facility's size relative to the cost of the metering/monitoring;
- (f) Other means of obtaining the data (e.g. Generating Facility logs, proxy data, etc.);
- (g) Requirements under any Interconnection Agreement with the Producer.

SDG&E will report to the Commission or designated authority, on a quarterly basis, the rationale for requiring Net Generation Metering equipment in each instance along with the size and location of the facility.

The requirements in this Section F.3 may not apply to Metering of Generating Facilities operating under SDG&E's Net Energy Metering tariff pursuant to California Public Utilities Code Section 2827, 2827.8, 2827.9, and 2827.10.

4. **Point of Common Coupling Metering.** For purposes of assessing SDG&E's charges for retail service, the Producer's PCC Metering shall be reviewed by SDG&E, and if required, replaced to ensure that it will appropriately measure electric power according to the provisions of the Customer's electric service tariff. Where required, the Customer's existing meter may be replaced with a bi-directional meter so that power deliveries to and from the Producer's site can be separately recorded. Alternately, the Producer may, at its sole option and cost, require SDG&E to install multi-metering equipment to separately record power deliveries to SDG&E's Distribution System and retail purchases from SDG&E. Where necessary, such PCC Metering shall be designed to prevent reverse registration.

Generating Facilities eligible for Net Energy Metering under Public Utilities Code Section 2827, 2827.8, 2827.9, or 2827.10 shall have metering provided pursuant to the terms of the applicable Net Energy Metering tariff schedule.

(Continued)

18P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

L

T

T

T

L

N

N

N

L

T

|

|

|

T

L

N

N

N



RULE 21

Sheet 19

L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

F. METERING, MONITORING AND TELEMETERING (Continued)

5. **Telemetering.** If the nameplate rating of the Generating Facility is 1 MW or greater, Telemetering equipment at the Net Generation Metering location may be required at the Producer's expense. If the Generating Facility is interconnected to a portion of SDG&E's Distribution System operating at a voltage below 10 kV, then Telemetering equipment may be required on Generating Facilities 250 kW or greater. SDG&E shall only require Telemetering to the extent that less intrusive and/or more cost effective options for providing the necessary data in real time are not available. SDG&E will report to the Commission or designated authority, on a quarterly basis, the rationale for requiring Telemetering equipment in each instance along with the size and location of the facility.
6. **Sunset Provision.** Sections F.3 and F.5 are interim provisions only. SDG&E shall file permanent Metering requirements with the Commission on or by December 31, 2005. At that time, SDG&E shall serve its application for approval of permanent Metering requirements on the service list in Order Instituting Rulemaking (OIR) 04-03-017.
7. **Location.** Where SDG&E-owned Metering Equipment is located on the Producer's premises, Producer shall provide, at no expense to SDG&E, a suitable location for all such Metering Equipment.
8. **Costs of Metering.** The Producer will bear all costs of the Metering required by this Rule, including the incremental costs of operating and maintaining the Metering Equipment.

G. DISPUTE RESOLUTION PROCESS

The following procedures will apply for disputes arising from this Rule.

1. The Commission shall have initial jurisdiction to interpret, add, delete or modify any provision of this Rule or of any agreements entered into between SDG&E and the Producer to implement this tariff ("The Implementing Agreements") and to resolve disputes regarding SDG&E's performance of its obligations under its tariffs, the applicable agreements, and requirements related to the Interconnection of the Producer's Generating or Interconnection Facilities pursuant to this Rule.
2. Any dispute arising between SDG&E and the Producer (individually "Party" and collectively "the Parties") regarding SDG&E's or Producer's performance of its obligations under its tariffs, The Implementing Agreements, and requirements related to the Interconnection of Producer's facilities pursuant to this Rule shall be resolved according to the following procedures:
 - a. The dispute shall be reduced to writing by the aggrieved Party in a letter ("the dispute letter") to the other Party containing the relevant known facts pertaining to the dispute, the specific dispute and the relief sought, and express notice by the aggrieved Party that it is invoking the procedures under Section G.2. Within 45 calendar days of the date of the dispute letter, the Parties' authorized representatives will be required to meet and confer to try to resolve the dispute.

(Continued)

19P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T

T

T



RULE 21

Sheet 20

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

G. DISPUTE RESOLUTION PROCESS (Continued)

- b. If the Parties do not resolve their dispute within 45 calendar days after the date of the dispute letter, the dispute shall, upon demand of either Party, be submitted to resolution before the Commission in accordance with the Commission's Rules of Practice and Procedure applicable to Customer complaints.
3. Pending resolution of any dispute under this Section, the Parties shall proceed diligently with the performance of their respective obligations under this Rule and The Implementing Agreements, unless the Implementing Agreements have been terminated. Disputes as to the application and implementation of this Section shall be subject to resolution pursuant to the procedures set forth in this Section.

H. DEFINITIONS

The definitions in this Section H are applicable only to this Rule, the Application, and Interconnection Agreements.

Anti-Islanding: A control scheme installed as part of the Generating or Interconnection Facility that senses and prevents the formation of an Unintended Island.

Applicant: The entity submitting an Application for Interconnection pursuant to this Rule.

Application: A Commission-approved form submitted to SDG&E for Interconnection of a Generating Facility.

Certification Test: A test pursuant to this Rule that verifies conformance of certain equipment with Commission-approved performance standards in order to be classified as Certified Equipment. Certification Tests are performed by NRTLs.

Certification; Certified; Certificate: The documented results of a successful Certification Testing.

Certified Equipment: Equipment that has passed all required Certification Tests.

Commission: The Public Utilities Commission of the State of California.

Commissioning Test: A test performed during the commissioning of all or part of a Generating Facility to achieve one or more of the following:

- Verify specific aspects of its performance;
- Calibrate its instrumentation; and
- Establish instrument or Protective Function set-points.

(Continued)

20P24

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 21

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

H. DEFINITIONS (Continued)

Customer: The entity that receives or is entitled to receive Distribution Service through SDG&E's Distribution System.

Dedicated Transformer; Dedicated Distribution Transformer: A transformer that provides electricity service to a single Customer. The Customer may or may not have a Generating Facility.

Device: A mechanism or piece of equipment designed to serve a purpose or perform a function. The term may be used interchangeably with the terms "equipment" and "function" without intentional difference in meaning. See also Function and Protective Function.

Distribution Service: All services required by, or provided to, a Customer pursuant to the approved tariffs of SDG&E other than services directly related to the Interconnection of a Generating Facility under this Rule.

Distribution System: All electrical wires, equipment, and other facilities owned or provided by SDG&E, other than Interconnection Facilities, by which SDG&E provides Distribution Service to its Customers.

Emergency: An actual or imminent condition or situation, which jeopardizes SDG&E's Distribution System integrity.

Field Testing: Testing performed in the field to determine whether equipment meets SDG&E's requirements for safe and reliable Interconnection.

Function: Some combination of hardware and software designed to provide specific features or capabilities. Its use, as in Protective Function, is intended to encompass a range of implementations from a single-purpose device to a section of software and specific pieces of hardware within a larger piece of equipment to a collection of devices and software.

Generating Facility: All Generators, electrical wires, equipment, and other facilities owned or provided by Producer for the purpose of producing electric power.

Generator: A device converting mechanical, chemical, or solar energy into electrical energy, including all of its protective and control functions and structural appurtenances. One or more Generators comprise a Generating Facility.

Gross Nameplate Rating; Gross Nameplate Capacity: The total gross generating capacity of a Generator or Generating Facility as designated by the manufacturer(s) of the Generator(s).

(Continued)

21P21

Advice Ltr. No. 1616-E

Decision No. _____


Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

L
L
N
N
N
L
L
N
N
N
L
L
T
L



17296-E

15532-E

Sheet 22

H. DEFINITIONS (Continued)

T	L
T	

TTT

L

N
N
N

$$\begin{array}{cc} & \text{L} \\ \text{T} & \text{L} \end{array}$$

Resolution No.



RULE 21

Sheet 23

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

H. DEFINITIONS (Continued)

Metering Equipment: All equipment, hardware, software including meter cabinets, conduit, etc. that are necessary for Metering.

Momentary Parallel Operation: The Interconnection of a Generating Facility to the Distribution System for one second (60 cycles) or less.

Nationally Recognized Testing Laboratory (NRTL): A laboratory accredited to perform the Certification Testing requirements under this Rule.

Net Energy Metering: Metering for the receipt and delivery of electricity between the Producer and SDG&E pursuant to Section 2827, 2827.8, 2827.9, or 2827.10 of the Public Utilities Code.

Net Generation Metering: Metering of the net electrical power or energy output in kW or energy in kWh, from a given Generating Facility. This may also be the measurement of the difference between the total electrical energy produced by a Generator and the electrical energy consumed by the auxiliary equipment necessary to operate the Generator. For a Generator with no Host Load and/or Public Utilities Code Section 218 Load (Section 218 Load), Metering that is located at the Point of Common Coupling. For a Generator with Host Load and/or Section 218 Load, Metering that is located at the Generator but after the point of auxiliary load(s) and prior to serving Host Load and/or Section 218 Load.

Net Nameplate Rating: The Gross Nameplate Rating minus the consumption of electrical power of a Generator or Generating Facility as designated by the manufacturer(s) of the Generator(s).

Network Service: More than one electrical feeder providing Distribution Service at a Point of Common Coupling.

Non-Export; Non-Exporting: Designed to prevent the transfer of electrical energy from the Generating Facility to SDG&E's Distribution System.

Non-Islanding: Designed to detect and disconnect from a stable Unintended Island with matched load and generation. Reliance solely on under/over voltage and frequency trip is not considered sufficient to qualify as Non-Islanding.

Parallel Operation: The simultaneous operation of a Generator with power delivered or received by SDG&E while Interconnected. For the purpose of this Rule, Parallel Operation includes only those Generating Facilities that are Interconnected with SDG&E's Distribution System for more than 60 cycles (one second).

Paralleling Device: An electrical device, typically a circuit breaker, operating under the control of a synchronization function or by a qualified operator to connect an energized generator to an energized electric power system or two energized power systems to each other.

(Continued)

23P27

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

L
T
T
L
N
N
N



RULE 21

Sheet 24

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

H. DEFINITIONS (Continued)

Periodic Test: A test performed on part or all of a Generating Facility/Interconnection Facilities at pre-determined time or operational intervals to achieve one or more of the following: (1) verify specific aspects of its performance; (2) calibrate instrumentation; and (3) verify and re-establish instrument or Protective Function set-points.

Point of Common Coupling (PCC): The transfer point for electricity between the electrical conductors of SDG&E and the electrical conductors of the Producer.

Point of Common Coupling Metering: Metering located at the Point of Common Coupling. This is the same Metering as Net Generation Metering for Generating Facilities with no Host Load and/or Section 218 Load.

Point of Interconnection: The electrical transfer point between a Generating Facility and SDG&E's Distribution System. This may or may not be coincident with the Point of Common Coupling.

Producer: The entity that executes an Interconnection Agreement with SDG&E. The Producer may or may not own or operate the Generating Facility, but is responsible for the rights and obligations related to the Interconnection Agreement.

Production Test: A test performed on each device coming off the production line to verify certain aspects of its performance.

Protective Function(s): The equipment, hardware and/or software in a Generating Facility (whether discrete or integrated with other functions) whose purpose is to protect against Unsafe Operating Conditions.

Prudent Electrical Practices: Those practices, methods, and equipment, as changed from time to time, that are commonly used in prudent electrical engineering and operations to design and operate electric equipment lawfully and with safety, dependability, efficiency, and economy.

Scheduled Operation Date: The date specified in the Interconnection Agreement when the Generating Facility is, by the Producer's estimate, expected to begin operation pursuant to this Rule.

Secondary Network: A network supplied by several primary feeders suitably interlaced through the area in order to achieve acceptable loading of the transformers under Emergency conditions and to provide a system of extremely high service reliability. Secondary Networks usually operate at 600 V or lower.

Section 218 Load: Electrical power that is supplied in compliance with California Public Utilities Code Section 218. Public Utilities Code Section 218 defines an "Electric Corporation" and provides conditions under which a transaction involving a Generating Facility would not classify a Producer as an Electric Corporation. These conditions relate to "over-the-fence" sale of electricity from a Generating Facility without using SDG&E's Distribution System.

(Continued)

24P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 25

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

H. DEFINITIONS (Continued)

Short Circuit (Current) Contribution Ratio (SCCR): The ratio of the Generating Facility's short circuit contribution to the short circuit contribution provided through SDG&E's Distribution System for a three-phase fault at the high voltage side of the distribution transformer connecting the Generating Facility to SDG&E's Distribution System.

Simplified Interconnection: Interconnection conforming to the Initial Review requirements under this Rule, as determined by Section I.

Single Line Diagram; Single Line Drawing: A schematic drawing, showing the major electric switchgear, Protective Function devices, wires, Generators, transformers and other devices, providing sufficient detail to communicate to a qualified engineer the essential design and safety of the system being considered.

Special Facilities: As defined in SDG&E's Rule 2 governing Special Facilities.

Starting Voltage Drop: The percentage voltage drop at a specified point resulting from In-rush Current. The Starting Voltage Drop can also be expressed in volts on a particular base voltage, (e.g. 6 volts on a 120-volt base, yielding a 5% drop).

Supplemental Review: A process wherein SDG&E further reviews an Application that fails one or more of the Initial Review Process screens. The Supplemental Review may result in one of the following: a) approval of Interconnection; b) approval of Interconnection with additional requirements; or c) cost and schedule for an Interconnection Study.

System Integrity: The condition under which SDG&E's Distribution System is deemed safe and can reliably perform its intended functions in accordance with the safety and reliability rules of SDG&E.

Telemetry: The electrical or electronic transmittal of Metering data on a real-time basis to SDG&E.

Transfer Trip: A Protective Function that trips a Generating Facility remotely by means of an automated communications link controlled by SDG&E.

Type Test: A test performed on a sample of a particular model of a device to verify specific aspects of its design, construction and performance.

(Continued)

25P27

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 26

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

H. DEFINITIONS (Continued)

Unintended Island: The creation of an Island, usually following a loss of a portion of SDG&E's Distribution System, without the approval of SDG&E.

Unsafe Operating Conditions: Conditions that, if left uncorrected, could result in harm to personnel, damage to equipment, loss of System Integrity or operation outside pre-established parameters required by the Interconnection Agreement.

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES

1. **Introduction:** This review process allows for rapid approval for the Interconnection of those Generating Facilities that do not require an Interconnection Study. The review process includes a screening to determine if a Supplemental Review is required.

Note: Failure to pass any screen of the review process means only that further review and/or studies are required before the Generating Facility can be approved for Interconnection with SDG&E's Distribution System. It does not mean that the Generating Facility cannot be Interconnected. Though not explicitly covered in the Initial Review Process the Generating Facility shall be designed to meet all of the applicable requirements in Section D.

2. **Purpose:** The review determines the following:

- a. If a Generating Facility qualifies for Simplified Interconnection;
- b. If a Generating Facility can be made to qualify for Interconnection with a Supplemental Review determining any additional requirements; or
- c. If an Interconnection Study is required, the cost estimate and schedule for performing the Interconnection Study.

(Continued)

26P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21


Sheet 27

L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

Initial and Supplemental Review Process Flow Chart

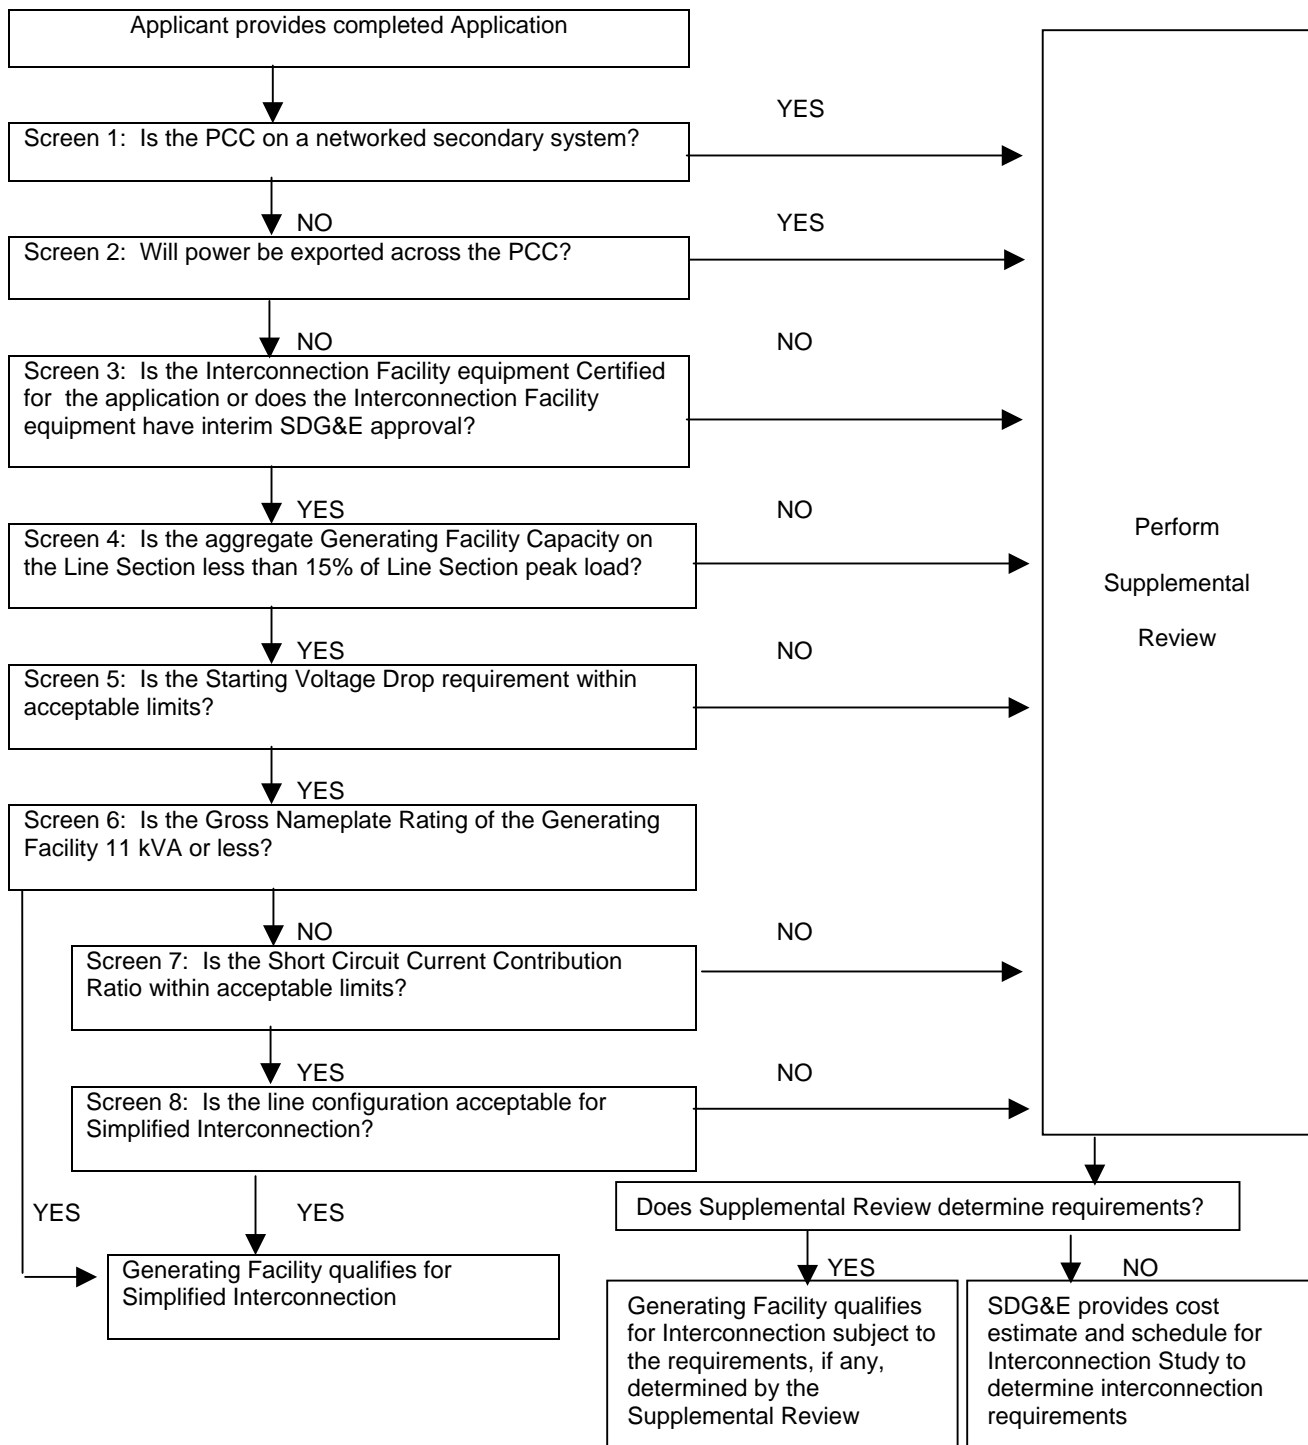

(Continued)

T

T

T

T

27P31

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 28

L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

3. Review Process Details

a. **Screen 1: Is the PCC on a Networked Secondary System?**

- If Yes, Generating Facility does not qualify for Simplified Interconnection. Perform Supplemental Review.
- If No, continue to next screen.

Significance:

Special considerations must be given to Generating Facilities proposed to be installed on networked secondary Distribution Systems because of the design and operational aspects of network protectors. There are no such considerations for radial Distribution Systems.

b. **Screen 2: Will power be exported across the PCC?**

- If Yes, the Generating Facility does not qualify for Simplified Interconnection. Perform Supplemental Review.
- If No, Generating Facility must incorporate one of the following four options:

Option 1 ("Reverse Power Protection"):

To ensure power is not exported across the PCC, a reverse power Protective Function may be provided. The default setting for this Protective Function, when used, shall be 0.1% (export) of the service transformer's rating, with a maximum 2.0 second time delay.

Option 2 ("Minimum Power Protection"):

To ensure at least a minimum amount of power is imported across the PCC at all times (and, therefore, that power is not exported), an under-power Protective Function may be provided. The default setting for this Protective Function, when used, shall be 5% (import) of Generating Facility's total Gross Nameplate Rating, with a maximum 2.0 second time delay.

Option 3 ("Certified Non-Islanding Protection"):

To ensure the incidental export of power is limited to acceptable levels, this option, when used, requires that all of the following conditions be met: a) The total Gross Nameplate Rating Capacity of the Generating Facility must be no more than 25% of the nominal ampere rating of the Producer's service equipment; b) The total Gross Nameplate Capacity of the Generating Facility must be no more than 50% of the Producer's service transformer capacity rating (this capacity requirement does not apply to Customers taking primary service without an intervening transformer); and c) The Generating Facility must be Certified as Non-Islanding.

(Continued)

28P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T
T

T
T



RULE 21

Sheet 29

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

3. Review Process Details (Continued)

b. **Screen 2: Will power be exported across the PCC?** (Continued)

The ampere rating of the Customer's Service Equipment to be used in this evaluation will be that rating for which the Customer's utility service was originally sized or for which an upgrade has been approved. It is not the intent of this provision to allow increased export simply by increasing the size of the Customer's service panel, without separate approval for the resize.

Option 4 ("Relative Generating Facility Rating"):

This option, when used, requires the Net Nameplate Rating of the Generating Facility to be so small in comparison to its host facility's minimum load, that the use of additional Protective Functions is not required to insure that power will not be exported to SDG&E's Distribution System. This option requires the Generating Facility capacity to be no greater than 50% of the Producer's verifiable minimum Host Load over the past 12 months.

Significance:

- (1) If it can be ensured that the Generating Facility will not export power, SDG&E's Distribution System does not need to be studied for Load-Carrying Capability or Generating Facility power flow effects on SDG&E voltage regulators.
- (2) This Screen permits the use of reverse-power or minimum-power relaying as a positive Non-Islanding Protective Function (Options 1, 2 and 3)
- (3) This screen allows, under certain defined conditions, for Generating Facilities that incorporate Certified Non-Islanding protection to qualify for Simplified Interconnection without implementing reverse power or minimum power Protective Functions (Option3).

c. **Screen 3: Is the Interconnection Facilities equipment Certified for the application or does the Interconnection Facilities equipment have interim SDG&E approval?**

- If Yes, continue to next screen.
- If No, the Generating and/or Interconnection Facility does not qualify for Simplified Interconnection. Perform Supplemental Review.

Interim approval allows SDG&E to treat equipment that has not completed the Rule 21 Certification requirements as having met the intent of this screen. Interim approval is granted, at SDG&E's discretion on a case by case basis, and approval for one Generating Facility does not guarantee approval for any other Generating Facility.

(Continued)

29P28

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

N

N

L

T

T

T

L

N

N

N

N

L

L

N

N

N

N



RULE 21

Sheet 30

L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

3. Review Process Details (Continued)

c. **Screen 3: Is the Interconnection Facilities equipment Certified for the application or does the Interconnection Facilities equipment have interim SDG&E approval?** (Continued)

Significance:

If the Generating and/or Interconnection Facilities have been Certified or previously approved by SDG&E, SDG&E does not need to repeat its full review and/or test of the Generating and/or Interconnection Facilities' Protective Functions. Site Commissioning Testing may still be required to insure that the Protective Functions are working properly.

Certification indicates that the criteria in Section J, as appropriate, have been tested and verified.

d. **Screen 4: Is the aggregate Generating Facility capacity on the Line Section less than 15% of Line Section peak load?**

- If Yes, continue to next screen.
- If No, Generating Facility does not qualify for Simplified Interconnection.
Perform Supplemental Review to determine cumulative impact on Line Section.

Significance:

(1) Low penetration of Generating Facility installations will have a minimal impact on the operation and load restoration efforts of SDG&E's Distribution System.

(2) The operating requirements for a high penetration of Generating Facilities may be different since the impact on SDG&E's Distribution System will no longer be minimal, therefore requiring additional study or controls.

e. **Screen 5: Is the Starting Voltage Drop within acceptable limits?**

- If Yes, continue to next screen.
- If No, Generating Facility does not qualify for Simplified Interconnection.
Perform Supplemental Review.

(Continued)

30P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T
T
D



RULE 21

Sheet 31

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES
(Continued)

3. Review Process Details (Continued)

e. **Screen 5: Is the Starting Voltage Drop within acceptable limits?** (Continued)

Note: This Screen only applies to Generating Facilities that start by motoring the Generator(s).

SDG&E has two options in determining whether Starting Voltage Drop is acceptable. The option to be used is at SDG&E's discretion:

Option 1:

SDG&E may determine that the Generating Facility's starting In-Rush Current is equal to or less than the continuous ampere rating of the Customer's service equipment.

Option 2:

SDG&E may determine the impedances of the service distribution transformer (if present) and the secondary conductors to Customer's service equipment and perform a voltage drop calculation. Alternatively, SDG&E may use tables or nomographs to determine the voltage drop. Voltage drops caused by starting a Generator as a motor must be less than 2.5% for primary Interconnections and 5% for secondary Interconnections.

Significance:

- (1) This Screen addresses potential voltage fluctuation problems that may be caused by Generators that start by motoring.
- (2) When starting, Generating Facilities should have minimal impact on the service voltage to other SDG&E Customers.
- (3) Passing this screen does not relieve the Producer from ensuring that its Generating Facility complies with the flicker requirements of this Rule, Section D.2.d.

f. **Screen 6: Is the Gross Nameplate Rating of the Generating Facility 11 kVA or less?**

- If Yes, Generating Facility qualifies for Simplified Interconnection. Skip remaining screens.
- If No, continue to next screen.

(Continued)

31P26

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 32

L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

3. Review Process Details (Continued)

f. **Screen 6: Is the Gross Nameplate Rating of the Generating Facility 11 kVA or less?** (Continued)

Significance:

The Generating Facility will have a minimal impact on fault current levels and any potential line overvoltages from loss of SDG&E's Distribution System neutral grounding.

g. **Screen 7: Is the Short Circuit Current Contribution Ratio within acceptable limits?**

- If Yes, continue to next screen.
- If No, Generating Facility does not qualify for Simplified Interconnection. Perform Supplemental Review.

The Short Circuit Current Contribution Ratio Screen consists of two criteria; both of which must be met when applicable:

- (1) When measured at primary side (high side) of the Dedicated Distribution Transformer serving a Generating Facility, the sum of the Short Circuit Contribution Ratios of all Generating Facilities connected to SDG&E's Distribution System circuit that serves the Generating Facility must be less than or equal to 0.1, and
- (2) When measured at the secondary side (low side) of a shared distribution transformer, the short circuit contribution of the Generating Facility must be less than or equal to 2.5% of the interrupting rating of the Producer's Service Equipment.

Significance:

If the Generating Facility passes this Screen, it can be expected that it will have no significant impact on SDG&E's Distribution System's short circuit duty, fault detection sensitivity, relay coordination or fuse-saving schemes.

(Continued)

T

32P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 33

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

I. REVIEW PROCESS FOR APPLICATIONS TO INTERCONNECT GENERATING FACILITIES (Continued)

3. Review Process Details (Continued)

h. **Screen 8: Is the line configuration compatible with the Interconnection type?**

- If Yes, Generating Facility qualifies for Simplified Interconnection.
- If No, then Generating Facility does not qualify for Simplified Interconnection. Perform Supplemental Review.

Line Configuration Screen:

Identify primary distribution line configuration that will serve the Generating Facility. Based on the type of Interconnection to be used for the Generating Facility, determine from Table I.1 if the proposed Generating Facility passes this Screen.

Table I.1

Primary Distribution Line Type Configuration	Type of Interconnection to be made to Primary Distribution Line	Result/Criteria
Three-phase, three-wire	Any type	Pass Screen
Three-phase, four-wire	Single-phase, line-to-neutral	Pass Screen
Three-phase, four-wire (For any line that has such a section OR mixed three wire & four wire)	All others	To pass, aggregate Generating Facility nameplate rating must be less than or equal to 10% of Line Section peak load.

Significance:

If the primary distribution line serving the Generating Facility is of a "three-wire" configuration, or if the Generating Facility's distribution transformer is single-phase and connected in a line-to-neutral configuration, then there is no concern about overvoltages to SDG&E's, or other Customer's equipment caused by loss of system neutral grounding during the operating time of the Anti-Islanding Protective Function.

(Continued)

33P27

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 34

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA

1. Introduction

This Section describes the test procedures and requirements for equipment used for the Interconnection of Generating Facilities to SDG&E's Distribution System. Included are Type Testing, Production Testing, Commissioning Testing, and Periodic Testing. The procedures listed rely heavily on those described in appropriate Underwriters Laboratory (UL), Institute of Electrical and Electronic Engineers (IEEE), and International Electrotechnical Commission (IEC) documents—most notably UL 1741 and IEEE 929—as well as the testing described in *May 1999 New York State Public Service Commission's Interconnection Requirements*. As noted in Section A, this rule has been revised to be consistent with ANSI/IEEE 1547-2003 *Standard for Interconnecting Distributed Resources with Electric Power Systems*.

The tests described here, together with the technical requirements in Section D of this Rule, are intended to provide assurance that the Generating Facility's equipment will not adversely affect SDG&E's Distribution System and that a Generating Facility will cease providing power to SDG&E's Distribution System under abnormal conditions. The tests were developed assuming a low level of Generating Facility penetration or number of connections to SDG&E's Distribution System. At high levels of Generating Facility penetration, additional requirements and corresponding test procedures may need to be defined.

Section J also provides criteria for "Certifying" Generators or inverters. Once a Generator or inverter has been Certified per this Rule, it may be considered suitable for Interconnection with SDG&E's Distribution System. Subject to the exceptions described in this Section J, SDG&E will not repeat the design review or require retesting of such Certified Equipment. It should be noted that the Certification process is intended to facilitate Certified Generating Facility Interconnections. Certification is not a prerequisite to interconnect a Generating Facility.

The revisions made to this Rule relative to IEEE 1547-2003 have resulted in changes in set points, test criteria, test procedures, and other requirements that will impact previously certified or listed equipment as well as equipment currently under evaluation. These changes were made to provide consistency with IEEE 1547. Equipment that is certified or that has been submitted to a NRTL for testing on or before December 31, 2004 and that subsequently meets the previous Rule 21 Certification requirements will continue to be accepted as Certified Equipment through December 31, 2005.

(Continued)

34P28

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

L
T
T
T
T
L
N
N



RULE 21

Sheet 35

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

2. Certified and Non-Certified Interconnection Equipment

a. Certified Equipment

Equipment tested and approved (e.g. "Listed") by an accredited NRTL as having met both the Type Testing and Production Testing requirements described in this document is considered to be Certified Equipment for purposes of Interconnection with SDG&E's Distribution System. Certification may apply to either a pre-packaged system or an assembly of components that address the necessary functions. Type Testing may be done in the manufacturer's factory or test laboratory, or in the field. At the discretion of the testing laboratory, field-Certification may apply only to the particular installation tested. In such cases, some or all of the tests may need to be repeated at other installations.

When equipment is Certified by a NRTL, the NRTL shall provide to the manufacturer, at a minimum, a Certificate with the following information for each device:

Administrative:

- (1) The effective date of Certification or applicable serial number (range or first in series), and/or other proof that Certification is current;
- (2) Equipment model number(s) of the Certified equipment;
- (3) The software version utilized in the equipment, if applicable;
- (4) Test procedures specified (including date or revision number); and
- (5) Laboratory accreditation (by whom and to what standard).

Technical (As appropriate):

- (1) Device ratings (kW, kVA, Volts, amps, etc.);
- (2) Maximum available fault current in Amps;
- (3) In-rush Current in Amps;
- (4) Trip points, if factory set (trip Value and timing);
- (5) Trip point and timing ranges for adjustable settings;
- (6) Nominal power factor or range if adjustable;
- (7) If the equipment is Certified for Non-Exporting and the method used (reverse power or underpower); and
- (8) If the equipment is Certified as Non-Islanding.

It is the responsibility of the equipment manufacturer to ensure that Certification information is made publicly available by the manufacturer, the testing laboratory, or by a third party.

(Continued)

35P32

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 36

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

2. Certified and Non-Certified Interconnection Equipment (Continued)

b. Non-Certified Equipment

For non-Certified equipment, some or all of the tests described in this Rule may be required by SDG&E for each Generating Facility and/or Interconnection Facilities. The manufacturer or a laboratory acceptable to SDG&E may perform these tests. Test results for non-Certified equipment must be submitted to SDG&E for Supplemental Review. Approval by SDG&E for equipment used in a particular Generating Facility and/or Interconnection Facilities does not guarantee SDG&E's approval for use in other Generating Facility and/or Interconnection Facilities.

3. Type Testing

a. **Type Tests and Criteria Requirements for Interconnection Equipment Certification.** Type Testing provides a basis for determining that equipment meets the specifications for being designated as Certified Equipment under this Rule. The requirements described in this Section cover only issues related to Interconnection and are not intended to address device safety or other issues.

Table J.1. defines the test criteria by Generator or inverter technology. While UL 1741(1) was written specifically for inverters, the requirements are readily adaptable to synchronous Generators, induction Generators, as well as single/multi-function controllers and protection relays. Until a universal test standard is developed, SDG&E or NRTL shall adapt the procedures referenced in Table J.1 as appropriate and necessary for a Generating Facility and/or Interconnection Facility or associated equipment performance and its control and protection system functions. The tests shall be performed in the sequence shown in Table J.2.

(Continued)

36P24

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 37

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

3. Type Testing (Continued)

a. **Type Tests and Requirements for Interconnection Equipment Certification** (Continued)

Table J.1 Tests and Requirements for Interconnection Equipment Certification

Type Test	Reference (1)	Inverter	Synchronous Generator	Induction Generator
Utility Interaction	UL 1741 - 39	X	X	X
DC Isolation	UL 1741 - 40.1	X	—	—
Simulated PV Array (Input) Requirements	UL 1741 - 41.2	X	—	—
Dielectric Voltage Withstand	UL 1741 - 44	X	X	X
Power Factor	UL 1741 - 45.2.2	X	X	X
Harmonic Distortion	UL 1741 - 45.4	X	X	X
DC Injection	UL 1741 - 45.5	X	—	—
Utility Voltage and Frequency Variation	UL 1741 - 46.2	X	X	X
Reset Delay	UL 1741 - 46.2.3	X	X	X
Loss of Control Circuit	UL 1741 - 46.4	X	X	X
Short Circuit	UL 1741 - 47.3	X	X	X
Load Transfer	UL 1741 - 47.7	X	X	X
Surge Withstand Capability	J.3.e	X	X	X
Anti-Islanding	J.3.b	(2)	(2)	(2)
Non-Export	J.3.c	(3)	(3)	(3)
In-rush Current	J.3.d	—	—	(4)
Synchronization	J.3.f	(5)	X	(5)

Table Notes:

- (1) References are to section numbers in either UL 1741 (Inverters, Converters and Charge Controllers for use in Independent Power Systems) or this Rule. References in UL 1741 to "photovoltaics" or "inverter" may have to be adapted to the other technologies by the testing laboratory to appropriately apply the tests to other technologies.
- (2) Required only if Non-Islanding designation.
- (3) Required only if Non-Export designation is desired.
- (4) Required for Generators that use SDG&E power to motor to speed.
- (5) Required for all self-excited induction Generators as well as inverters that operate as voltage sources when connected to SDG&E.

X = Required

— = Not required

(Continued)

37P24

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 38

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

3. Type Testing (Continued)

a. **Type Tests and Requirements for Interconnection Equipment Certification** (Continued)

Table J.2 Type Tests Sequence for Interconnection Equipment Certification

Test No.	Type Test
1	Utility Voltage and Frequency Variation
2	Synchronization
3	Surge Withstand Capability
4	Utility Voltage and Frequency Variation
5	Synchronization
6	Other Required and Optional Tests
Tests 1,2 and 3 must be done first and in the order shown. Tests 4 and on follow in order convenient to the testing agency.	

b. **Anti-Islanding Test**

Devices that pass the Anti-Islanding test procedure described in UL 1741 Section 46.3 will be considered Non-Islanding for the purposes of these Interconnection requirements. The test is required only for devices for which a Certified Non-Islanding designation is desired.

c. **Non-Export Test**

Equipment that passes the Non-Exporting test procedure described in Section J.7.a. will be considered Non-Exporting for the purposes of these Interconnection requirements. This test is required only for equipment for which a Certified Non-Export designation is desired.

d. **In-rush Current Test**

Generation equipment that utilizes SDG&E power to motor up to speed will be tested using the procedure defined in Section J.7.b. to determine the maximum current drawn during this startup process. The resulting In-rush Current is used to estimate the Starting Voltage Drop.

(Continued)

38P25

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 39

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

3. Type Testing (Continued)

e. **Surge Withstand Capability Test**

The Interconnection equipment shall be tested for the surge withstand requirement in Section D.1.c in all normal operating modes in accordance with IEEE STD C62.45-2002 for equipment rates less than 1000 V to confirm that the surge withstand capability is met by using the selected test level(s) from IEEE STD C62.41.2-2002. Interconnection equipment rated greater than 1000 V shall be tested in accordance with manufacturer or system integrator designated applicable standards. For Interconnection equipment signal and control circuits, use IEEE STD C37.90.1-2002. These tests shall confirm the equipment did not fail, did not misoperate, and did not provide misinformation (IEEE 1547-5.1.3.2).

The location/exposure category for which the equipment has been tested shall be clearly marked on the equipment label or in the equipment documentation. External surge protection may be used to protect the equipment in harsher location/exposure categories.

f. **Synchronization Test**

This test is applied to synchronous Generators, self-excited induction Generators, and inverters capable of operating as voltage-source while connected to SDG&E's Distribution System. The test is also applied to the re-synchronization Function (transition from stand-alone to parallel operation) on equipment that provides such functionality². This test is not necessary for induction generators or current-source inverters. Instead, the In-rush Current test per Section J.3.d shall be applied to those units.

This test shall demonstrate that at the moment of the paralleling-device closure, all three synchronization parameters in Table J.3 are within the stated limits. This test shall also demonstrate that if any of the parameters are outside of the limits stated in the table, the paralleling-device shall not close (IEEE 1547-5.1.2A). The test will start with only one of the three parameters: (1) voltage difference between Generating Facility and SDG&E's Distribution System.; (2) frequency difference; or (3) phase angle outside of the synchronization specification. Verify that the Generating Facility is brought within specification prior to synchronization. Repeat the test five times for each of the three parameters. For manual synchronization with synch check or manual control with auto-synchronization, the test must verify that paralleling does not occur until the parameters are brought within specifications.

²The test may not need to be performed on both the synchronization and re-synchronization functions if the manufacturer can verify to the satisfaction of the testing organization that monitoring and controls hardware and software are common to both functions.

(Continued)

39P28

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

L
T
L
N
N
N
N
L
T
L
N
N
N
N



San Diego Gas & Electric Company
San Diego, California

Revised Cal. P.U.C. Sheet No. 17313-E
Canceling Revised Cal. P.U.C. Sheet No. 15549-E

RULE 21

Sheet 39

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

(Continued)

39P28

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 40

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

3. Type Testing (Continued)

f. **Synchronization Test** (Continued)

Table J. 3 Synchronization Parameter Limits [1]

Aggregate Rating of Generator Units (kVA)	Frequency Difference (Δf , Hz)	Voltage Difference (ΔV , %)	Phase Angle Difference ($\Delta \Phi$, °)
0 – 500	0.3	10	20
> 500 – 1,500	0.2	5	15
> 1,500 – 10,000	0.1	3	10

[1] – IEEE 1547-5.1.1B

g. **Paralleling Device Withstand Test**

The di-electric voltage withstand test specified in Section J.1 shall be performed on the paralleling device to ensure compliance with those requirements specified in D.1.c (IEEE 1547-5.1.3.3).

4. Production Testing

As a minimum, each interconnection system shall be subjected to the Utility Voltage and Frequency Variation Test procedure described in UL1741 under Manufacturing and Production Tests, Section 68, and the Synchronization test specified in Section J.3.f. Interconnection systems with adjustable set points shall be tested at a simple set of set points as specified by the manufacturer. This testing may be performed in the factory or as part of a Commissioning Test (Section J.5.).

5. Commissioning Testing

a. Commissioning Testing, where required, will be performed on-site to verify protective settings and functionality. Upon initial Parallel Operation of a Generating Facility, or any time interface hardware or software is changed that may affect the functions listed below, a Commissioning Test must be performed. An individual qualified in testing protective equipment (professional engineer, factory-Certified technician, or licensed electrician with experience in testing protective equipment) must perform Commissioning Testing in accordance with the manufacturer's recommended test procedure to verify the settings and requirements of this Rule.

(Continued)

40P32

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

N

N

T L

T

T

T

L

D



RULE 21

Sheet 41

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

5. Commissioning Testing (Continued)

SDG&E may require a written Commissioning Test procedure be submitted to SDG&E at least 10 working days prior to the performance of the Commissioning Test. SDG&E has the right to witness Commissioning Tests. SDG&E may also require written Certification by the installer describing which tests were performed and their results. Protective Functions to be tested during commissioning, particularly with respect to non-Certified equipment, may consist of the following:

- Over and under-voltage
- Over and under-frequency
- Anti-Islanding function (if applicable)
- Non-Exporting function (if applicable)
- Inability to energize dead line
- Time delay on restart after utility source is stable
- Utility system fault detection (if used)
- Synchronizing controls (if applicable)
- Other Interconnection Protective Functions that may be required as part of the Interconnection Agreement

Commissioning Test shall include visual inspections of the Interconnection equipment and protective settings to confirm compliance with the Interconnection requirements.

b. Other checks and tests that may need to be performed include:

- Verifying final Protective Function settings
- Trip test (J.5.f)
- In-service test (J.5.g)

N
N
T L
T L
N N
L
L

(Continued)



RULE 21

Sheet 42 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

5. Commissioning Testing (Continued)

c. Certified Equipment

Generating Facilities qualifying for Simplified Interconnection incorporate Certified equipment that have, at a minimum, passed the Type Tests and Production Tests described in this Rule, are judged to have little or no potential impact on SDG&E's Distribution System. For such Generating Facilities, it is necessary to perform only the following tests:

- (1) Protective Function settings that have been changed after Production Testing will require field verification. Tests shall be performed using injected secondary frequencies, voltages and currents, applied waveforms, at a test connection using a Generator to simulate abnormal utility voltage or frequency, or varying the set points to show that the device trips at the measured (actual) utility voltage or frequency.
- (2) The Non-Islanding Function shall be checked by operating a load break disconnect switch to verify the Interconnection equipment ceases to energize SDG&E's Distribution System and does not re-energize it for the required time delay after the switch is closed.
- (3) The Non-Exporting function shall be checked using secondary injection techniques. This function may also be tested by adjusting the Generating Facility output and local loads to verify that the applicable Non-Exporting criteria (i.e., reverse power or under power) are met.

The Supplemental Review or an Interconnection Study may impose additional components or additional testing.

d. Non-Certified Equipment

Non-Certified equipment shall be subjected to the appropriate tests described in Type Testing (Section J.3.) as well as those described in Certified Equipment Commissioning Test (Section J.5.c.). With SDG&E's approval, these tests may be performed in the factory, in the field as part of commissioning, or a combination of both. SDG&E, at its discretion, may also approve a reduced set of tests for a particular Generating Facility or, for example, if it determines it has sufficient experience with the equipment.

(Continued)

42P19

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 43 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

5. Commissioning Testing (Continued)

e. Verification of Settings

At the completion of Commissioning testing, the Producer shall confirm all devices are set to SDG&E-approved settings. Verification shall be documented in the Commissioning Test Certification.

f. Trip Tests

Interconnection Protective Functions and devices (e.g. reverse power relays) that have not previously been tested as part of the Interconnection Facilities with their associated interrupting devices (e.g. contactor or circuit breaker) shall be trip tested during commissioning. The trip test shall be adequate to prove that the associated interrupting devices open when the protective devices operate. Interlocking circuits between Protective Function devices or between interrupting devices shall be similarly tested unless they are part of a system that has been tested and approved during manufacturing.

g. In-service Tests

Interconnection Protective Functions and devices that have not previously been tested as part of the Interconnection Facilities with their associated instrument transformers or that are wired in the field shall be given an in-service test during commissioning. This test will verify proper wiring, polarity, CT/PT ratios, and proper operation of the measuring circuits. The in-service test shall be made with the power system energized and carrying a known level of current. A measurement shall be made of the magnitude and phase angle of each Alternating Current ("AC") voltage and current connected to the protective device and the results compared to expected values. For protective devices with built-in Metering Functions that report current and voltage magnitudes and phase angles, or magnitudes of current, voltage, and real and reactive power, the metered values may be used for in-service testing. Otherwise, portable ammeters, voltmeters, and phase-angle meters shall be used.

(Continued)

43P21

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.



RULE 21

Sheet 44 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

6. Periodic Testing

Periodic Testing of Interconnection-related Protective Functions shall be performed as specified by the manufacturer, or at least every four years. All Periodic Tests prescribed by the manufacturer shall be performed. The Producer shall maintain Periodic Test reports or a log for inspection by SDG&E. Periodic Testing conforming to SDG&E test intervals for the particular Line Section may be specified by SDG&E under special circumstances, such as high fire hazard areas. Batteries used to activate any Protective Function shall be checked and logged once per month for proper voltage. Once every four years, these batteries must be either replaced or a discharge test must be performed.

7. Type-Testing Procedures Not Defined In Other Standards

This Section describes the additional Type Tests necessary to qualify a device as Certified under this Rule. These Type Tests are not contained in Underwriters Laboratories UL 1741 Standard *Inverters, Converters and Controllers for Use in Independent Power Systems*, or other referenced standards.

a. **Non-Exporting Test Procedures**

The Non-Exporting test is intended to verify the operation of relays, controllers and inverters designed to limit the export of power and certify the equipment as meeting the requirements of Screen 2, Options 1 and 2, of the review process. Tests are provided for discrete relay packages and for controllers and inverters with the intended functions integrated.

(1) Discrete Reverse Power Relay Test

This version of the Non-Exporting test procedure is intended for discrete reverse power and under power relay packages provided to meet the requirements of Options 1 and 2 of Screen 2. It should be understood that in the reverse power application, the relay will provide a trip output with power flowing in the export (toward the SDG&E Distribution System) direction.

(Continued)

44P20

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



RULE 21

Sheet 45 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

7. Type Testing Procedures (Continued)

a. **Non-Exporting Test Procedure** (Continued)

(1) Discrete Reverse Power Relay Test (Continued)

Step 1: Power Flow Test at Minimum, Midpoint and Maximum Pickup Level Settings

Determine the corresponding secondary pickup current for the desired export power flow of 0.5 secondary watts (the minimum pickup setting, assumes 5 amp and 120V CT/PT secondary). Apply nominal voltage with minimum current setting at zero (0) degrees phase angle in the trip direction. Increase the current to pickup level. Observe the relay's (LCD or computer display) indication of power values. Note the indicated power level at which the relay trips. The power indication should be within 2% of the expected power. For relays with adjustable settings, repeat this test at the midpoint, and maximum settings. Repeat at phase angles of 90, 180 and 270 degrees and verify that the relay does not operate (measured watts will be zero or negative).

Step 2: Leading Power Factor Test

Apply rated voltage with a minimum pickup current setting (calculated value for system application) and apply a leading power factor load current in the non-trip direction (current lagging voltage by 135 degrees). Increase the current to relay rated current and verify that the relay does not operate. For relays with adjustable settings, this test should be repeated at the minimum, midpoint, and maximum settings.

Step 3: Minimum Power Factor Test

At nominal voltage and with the minimum pickup (or ranges) determined in Step 1, adjust the current phase angle to 84 or 276 degrees. Increase the current level to pickup (about 10 times higher than at 0 degrees) and verify that the relay operates. Repeat for phase angles of 90, 180 and 270 degrees and verify that the relay does not operate.

Step 4: Negative Sequence Voltage Test

Using the pickup settings determined in Step 1, apply rated relay voltage and current at 180 degrees from tripping direction, to simulate normal load conditions (for three-phase relays, use I_a at 180, I_b at 60 and I_c at 300 degrees). Remove Phase 1 voltage and observe that the relay does not operate. Repeat for Phases 2 and 3.

(Continued)

45P21

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.



RULE 21

Sheet 46 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

7. Type Testing Procedures (Continued)

a. **Non-Exporting Test Procedure** (Continued)

(1) Discrete Reverse Power Relay Test (Continued)

Step 5: Load Current Test

Using the pickup settings determined in Step 1, apply rated voltage and current at 180 degrees from the tripping direction, to simulate normal load conditions (use I_a at 180, I_b at 300 and I_c at 60 degrees). Observe that the relay does not operate.

Step 6: Unbalanced Fault Test

Using the pickup settings determined in Step 1, apply rated voltage and two times rated current, to simulate an unbalanced fault in the non-trip direction (use V_a at 0 degrees, V_b and V_c at 180 degrees, I_a at 180 degrees, I_b at 0 degrees, and I_c at 180 degrees). Observe that the relay, especially single phase, does operate properly.

Step 7: Time Delay Settings Test

Apply Step 1 settings and set time delay to minimum setting. Adjust the current source to the appropriate level to determine operating time, and compare against calculated values. Verify that the timer stops when the relay trips. Repeat at midpoint and maximum delay settings.

Step 8: Dielectric Test

Perform the test described in IEC 414 using 2 kV RMS for one minute.

Step 9: Surge Withstand Test

Perform the surge withstand test described in IEEE C37.90.1.1989 or the surge withstand capability test described in J.3.e.

(2) Discrete Underpower Relay Test

This version of the Non-Exporting test procedure is intended for discrete underpower relay packages and meets the requirements of Option 2 of Screen 2. A trip output will be provided when import power (toward the Producer's load) drops below the specified power level.

Note: For an under power relay, pickup is defined as the highest power level at which the relay indicates that the power is less than the set level.

(Continued)

46P21

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.



RULE 21

Sheet 47 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

7. Type Testing Procedures (Continued)

a. **Non-Exporting Test Procedure** (Continued)

(2) Discrete Underpower Relay Test (Continued)

Step 1: Power Flow Test at Minimum, Midpoint and Maximum Pickup Level Settings

Determine the corresponding secondary pickup current for the desired power flow pickup level of 5% of peak load minimum pickup setting. Apply rated voltage and current at 0 degrees phase angle in the direction of normal load current.

Decrease the current to pickup level. Observe the relay's (LCD or computer display) indication of power values. Note the indicated power level at which the relay trips. The power indication should be within 2% of the expected power. For relays with adjustable settings, repeat the test at the midpoint, and maximum settings. Repeat at phase angles of 90, 180 and 270 degrees and verify that the relay operates (measured watts will be zero or negative).

Step 2: Leading Power Factor Test

Using the pickup current setting determined in Step 1, apply rated voltage and rated leading power factor load current in the normal load direction (current leading voltage by 45 degrees). Decrease the current to 145% of the pickup level determined in Step 1 and verify that the relay does not operate. For relays with adjustable settings, repeat the test at the minimum, midpoint, and maximum settings.

Step 3: Minimum Power Factor Test

At nominal voltage and with the minimum pickup (or ranges) determined in Step 1, adjust the current phase angle to 84 or 276 degrees. Decrease the current level to pickup (about 10% of the value at 0 degrees) and verify that the relay operates. Repeat for phase angles 90, 180 and 270 degrees and verify that the relay operates for any current less than rated current.

Step 4: Negative Sequence Voltage Test

Using the pickup settings determined in Step 1, apply rated relay voltage and 25% of rated current in the normal load direction, to simulate light load conditions. Remove Phase 1 voltage and observe that the relay does not operate. Repeat for Phases 2 and 3.

(Continued)

47P20

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.



RULE 21

Sheet 48 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

7. Type Testing Procedures (Continued)

a. **Non-Exporting Test Procedure** (Continued)

(2) Discrete Underpower Relay Test (Continued)

Step 5: Unbalanced Fault Test

Using the pickup settings determined in Step 1, apply rated voltage and two times rated current, to simulate an unbalanced fault in the normal load direction (use V_a at 0 degrees, V_b and V_c at 180 degrees, I_a at 0 degrees, I_b at 180 degrees, and I_c at 0 degrees). Observe that the relay especially single-phase (types), operates properly.

Step 6: Time Delay Settings Test

Apply Step 1 settings and set time delay to minimum setting. Adjust the current source to the appropriate level to determine operating time, and compare against calculated values. Verify that the timer stops when the relay trips. Repeat at midpoint and maximum delay settings.

Step 7: Dielectric Test

Perform the test described in IEC 414 using 2 kV RMS for 1 minute.

Step 8: Surge Withstand Test

Perform the surge withstand test described in IEEE C37.90.1.1989 or the surge withstand capability test described in Section J.3.e.

(3) Test for Inverters and Controllers with Integrated Functions

Inverters and controllers designed to provide reverse or underpower Functions shall be tested to certify the intended operation of this function. Two methods are acceptable:

Method 1: If the inverter or controller utilizes external current/voltage measurement to determine the reverse or under power condition, then the inverter or controller shall be functionally tested by application of appropriate secondary currents and potentials as described in the Discrete Reverse Power Relay Test, Section J.7.a.(1) of this Rule.

Method 2: If external secondary current or voltage signals are not used, then unit-specific tests must be conducted to verify that power cannot be exported across the PCC for a period exceeding two seconds. These may be factory tests, if the measurement and control points are integral to the unit, or they may be performed in the field.

(Continued)

48P18

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.

T



RULE 21

Sheet 49 N L

INTERCONNECTION STANDARDS FOR NON-UTILITY OWNED GENERATION

J. CERTIFICATION AND TESTING CRITERIA (Continued)

7. Type Testing Procedures (Continued)

b. **In-rush Current Tests Procedures**

This test will determine the maximum In-rush Current drawn by the Generator.

(1) Locked-Rotor Method

Use the test procedure defined in NEMA MG-1 (manufacturer's data is acceptable, if available).

(2) Start-Up Method

Install and setup the Generating Facility equipment as specified by the manufacturer. Using a calibrated oscilloscope or data acquisition equipment with appropriate speed and accuracy, measure the current draw at the Point of Interconnection as the Generating Facility starts up and parallels with SDG&E's Distribution System. Startup shall follow the normal, manufacturer-specified procedure. Sufficient time and current resolution and accuracy shall be used to capture the maximum current draw within five percent. In-rush Current is defined as the maximum current draw from SDG&E during the startup process, using a 10-cycle moving average. During the test, the utility source, real or simulated, must be capable of maintaining voltage +/- 5% of rated at the connection to the unit under test. Repeat this test five times. Report the highest 10-cycle current as the In-rush Current. A graphical representation of the time-current characteristic along with the Certified In-rush Current must be included in the test report and made available to SDG&E.

49P15

Advice Ltr. No. 1616-E

Decision No.

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective

Resolution No.



San Diego Gas & Electric Company
San Diego, California

	<u>Revised</u>	Cal. P.U.C. Sheet No.	<u>17324-E</u>
Canceling	<u>Revised</u>	Cal. P.U.C. Sheet No.	<u>17140-E</u>

TABLE OF CONTENTS

Sheet 1

The following sheets contain all the effective rates and rules affecting rates, service and information relating thereto, in effect on the date indicated herein.

	<u>Cal. P.U.C. Sheet No</u>
TITLE PAGE.....	4812-E
TABLE OF CONTENTS.....	17324, 17133, 17123, 16985, 17325, 17141-E 17134, 16699, 15163, 16961, 15392-E
PRELIMINARY STATEMENT:	
I. General Information.....	8274, 16970, 16971-E
II. Balancing Accounts.....	17110, 15067, 11667, 15068, 16463, 16464, 16465-E 16466, 16467, 16468, 16469, 16987, 16988, 16989-E 16990, 16991, 16992, 16993, 16994, 16995, 16996-E 16997, 16998, 16999, 17000, 17001, 17016, 17017-E 17018, 17019, 17020, 17021, 17100, 17111-E
III. Memorandum Accounts.....	17009, 15078, 16491, 16492, 16493, 16494, 16495-E 16496, 16497, 16498, 16499, 16500, 16501, 16502-E 16503, 16504, 16505, 16506, 16507, 16508, 16509-E 16510, 16511, 16512, 16513, 16514, 16515, 16516-E 16517, 16518, 16519, 16520, 16521, 16522, 16523-E 16524, 16525, 16526, 16527, 16528, 16529, 16530-E 16531, 16921, 16533, 16534, 16535, 16686, 16687-E 16538, 16539, 16540, 16541, 16798, 16929, 17010-E
IV. Electric Distribution and Gas Performance Based Ratemaking (PBR) Mechanism.....	12125, 12126, 12127, 12128, 12129, 12130-E 12131, 13256, 12133, 12134, 12135, 12136-E 12137, 12138, 12139-E
V. SONGS 2&3 Procedures.....	17006, 17007-E
VI. Miscellaneous.....	16141, 16401, 15105, 12475, 12476, 16152-E 16148, 15106, 12480, 12481, 13257, 12483-E 12484, 12485, 12486, 15107, 164142, 16143-E
INDEX OF RATE AREA MAPS	
Map 1 - Territory Served.....	15228-E
Map 1-A - Territory Served.....	4916-E
Map 1-B - Territory Served.....	7295-E
Map 1-C - Territory Served.....	9135-E
Map 1-D - Territory Served.....	9136-E

(Continued)

1P8

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____



San Diego Gas & Electric Company
San Diego, California

Revised Cal. P.U.C. Sheet No. 17325-E
Canceling Revised Cal. P.U.C. Sheet No. 17083-E

TABLE OF CONTENTS

Sheet 5

RULES

<u>RULE NO.</u>	<u>SERVICE</u>	<u>CAL. P.U.C. SHEET NO.</u>
1	Definitions	17040, 16979, 16980, 16159, 16981, 14975, 14852, 15188-E 14854, 16144, 14856, 14857, 15120, 15121, 14860, 14861-E
2	Description of Service	6147, 6148, 6149, 6150, 6151, 6152, 6153, 6154-E 6155, 6156, 9101, 11451, 9103, 9104, 9105, 9106-E
3	Applications for Service	8431, 11596-E
4	Contracts	9107, 9108, 14099, 14100-E
5	Special Information Available for Customers	14157, 11452, 5925, 8797, 6499-E
6	Establishment & Re-establishment of Credit	8432, 8433-E
7	Deposits	6651, 6652-E
8	Notices	11453, 6787-E
9	Rendering and Payment of Bills	15695, 9112, 16598, 13231, 16599, 16094, 16904, 16600, 16601-E
10	Disputes	14158, 14159-E
11	Discontinuance of Service	11454, 6789, 6790, 8013, 6792, 8434, 11597, 15122-E
12	Rates and Optional Rates	4791-E
13	Temporary Service	14976-E
14	Shortage of Electric Supply and Interruption of Delivery	4794-E
15	Distribution Line Extensions	11220, 11221, 11222, 13235, 13202, 13203, 13204, 12777-E 17074, 17075, 17076, 17077, 17078, 17079-E
16	Service Extensions	11233, 13237, 10501, 11235, 11236, 13238-E 11238, 11239, 11240, 11241, 11242, 11243-E 11244, 11245-E
18	Meter Tests and Adjustment of Bills...	9744, 9739, 9740, 9741-E
19	Supply to Separate Premises and Resale	10504, 10505, 14101-E
20	Replacement of Overhead With Underground Electric Facilities	15060, 15061, 15062, 15164, 15064-E
21	Interconnection Standards for Non-Utility Owned Generation	17275, 17276, 17277, 17278, 17279, 17280, 17281, 17282, 17283, 17284-E 17285, 17286, 17287, 17288, 17289, 17290, 17291, 17292, 17293, 17294-E 17295, 17296, 17297, 17298, 17299, 17300, 17301, 17302, 17303, 17304-E 17305, 17306, 17307, 17308, 17309, 17310, 17311, 17312, 17313, 17314-E 17315, 17316, 17317, 17318, 17319, 17320, 17321, 17322, 17323-E
21	Final Standard Offer 4 Qualifying Facilities	7966 to 7989-E
22	Special Service Charges	8713, 8714-E
23	Competition Transition Charge Responsibility	12718, 15189, 15190, 15191, 15192, 15123, 10623, 10624-E 10625, 11899, 12721, 12722, 12723, 12724-E
24	The Hourly EECC Rate Option Rules	13986, 13987, 13988, 13989, 13990-E 13991, 13992, 13993, 13994-E
25	Direct Access Rules	10526, 14978, 10528 to 10533, 11901, 10535, 10536-E 12198, 10538, 10539, 12199, 10903 to 11930-E
28	Provision of Utility Right-of-Way Information	14167, 14168, 14169, 14170, 14171-E

(Continued)

5P8

Advice Ltr. No. 1616-E

Decision No. _____

Issued by
Lee Schavrien
Vice President
Regulatory Affairs

Date Filed Aug 18, 2004

Effective _____

Resolution No. _____

T
T
T
T
N